


# DECLARED PERFORMANCE

## CERTIFICATE OF CONSTANCE OF PERFORMANCE n°0068-CPR-041/2006 Rev.3 - revised on 31/01/2017

Fullfilling the requirements described in:  
EN 1935:2002 + AC:2003

Category of use	Durability	Test door mass	Suitability fire/smoke doors	Safety	Corrosion resistance	Security - Burglar resistance	Hinge grade
<b>4</b>	<b>7</b>	<b>7</b>	<b>1</b>	<b>1</b>	<b>0**</b>	<b>1</b>	<b>14</b>
Severe duty	200'000 cycles	160 kg	Suitable	Suitable	Not tested	Suitable	Heavy duty

Door Weight (Kg)

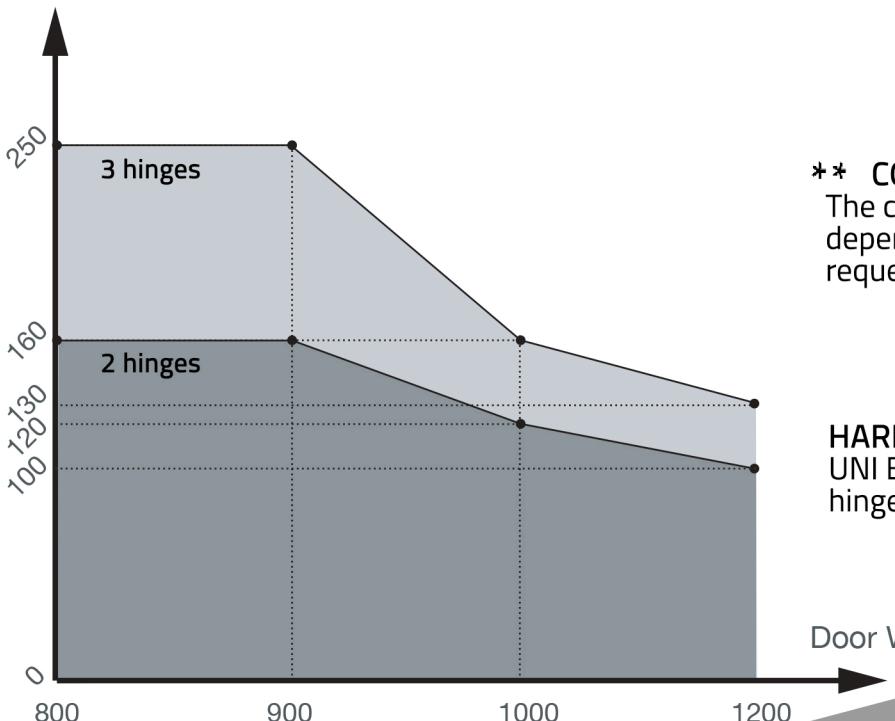

**\*\* CORROSION RESISTANCE (DIGIT 6):**  
The corrosion resistance hasn't been stated as it is depending on the surface treatment/finishing requested (electro galvanized/lackered/others).

HARMONISED TECHNICAL SPECIFICATION  
UNI EN 1935:2004-Building hardware-Single-axis hinges-Requirements and test methods

