

The K point
of view

FURNITURE
systems

Krona
Koblenz

KRONA KOBLENZ

For over 30 years we have been manufacturing adjustable concealed hinges and cutting-edge solutions for doors and furniture.

We plan our success and develop each activity in Coriano, Italy, in Krona Koblenz headquarter. Our Customers' needs are the background of our research.

Our Partners

We support our customers and partners because the best achievements come from their feedback: experience sharing gives us the inspiration to create new solutions and the motivation to push ourselves into new challenges.

Research and Development

The idea development is a particular and very important phase; for this reason, the development is supported by rapid prototyping machines and test benches compliant with the relevant regulations to obtain the best results.

Patents

We strongly believe in our ideas, this is why many of our products are protected by international patents.

Corporate Certifications



Krona Koblenz SpA adopts ISO 9001 certified quality management system, ensuring controlled processes, operational efficiency and continuous improvement, in order to offer products and services to the customers that meet the highest international standards.



KRONA KOBLENZ, Coriano, Italy





ONLINE CONSULTING

Are you working on a project and are you looking for a solution or an alternative to a problem?

Do you have doubts about the assembly or adjustment of one of our systems?
We have the right service for you!



Book a consultation with one of our experts by fixing the time that best suits you: we will be at your disposal to find a solution at any stage of your project. We will support you in the preliminary phase, in the executive design phase, but also during the installation or after-sales assistance without leaving your customers alone.

BOOK A CONSULTATION





SERVICES FOR YOU

We have designed and created tools and services to simplify the work of those who have decided to apply our products.

Catalogue

The catalog you are browsing will guide you to discover our complete range of sliding systems for furniture, including solutions for pocket doors. This tool is designed to offer you a broad overview of our proposals and help you easily identify the product that best suits your needs.

Website

Our website is now very easy to browse: starting from your needs, in a few clicks we will guide you until you get a selection of articles suitable for your needs. Try it now!

Design utilities

Simplified design with the new download area where you can download 3D, 2D CAD and media files, assembly instructions and much more.

Online consulting

Do you still have questions or did anything go wrong?

There is a technical sales consultant ready to help you, book a free consultation at our website. We are sure that we will find a suitable solution for you.

Product schooling

In our new “product schooling” section there are guidelines, tips, articles on carpentry and architecture as well as terms and definitions guide.

Training

News, updates and practical tests directly with the product are possible with our K-Mobile: a car equipped with our product range is on the move throughout the country with our sales technicians who visit our partners.

Interactive PDF catalog



Do you want to get the catalogue always updated? We offer an interactive PDF for easy consultation even from smartphones and laptop. Scan the QR Code and add the link to your favorites to always access the latest version of our catalogue.



Page

5 Terms and definitions

6 Sliding Systems
for furnitures and wardrobes

| | | | | | |
|---|---|--|---|--|---|
| <p>SLIDING Invisible</p>  | <p>SLIDING Top</p>  | <p>SLIDING Bottom</p>  | <p>DESIGN Bottom overlay shutter</p>  | <p>DESIGN Inset</p>  | <p>DESIGN Fully overlapping shutters</p>  |
| <p>SOFT-CLOSE</p> <p>ABS ●●●●●●●●</p> <p>DOUBLE</p> <p>Covering: Steel</p> | | | | | |

52 Pivot sliding door system
for furnitures and wardrobes


| | | | | |
|---|---|---|--|---|
| <p>APPLICATION Pivot sliding door pocket fitting</p>  | <p>APPLICATION Pivot sliding door pocket fitting</p>  | <p>SINGLE DOOR LEAF</p>  <p>1 kit for 1 shutter</p> | <p>DOUBLE DOOR LEAF</p>  <p>1 kit for 2 shutters</p> | <p>PRE-ASSEMBLED Quick and easy installation</p>  |
|---|---|---|--|---|

TERMS AND DEFINITIONS




Sliding Systems for furnitures and wardrobes


• SLIDING



Top
Hardware installed in the top part of the shutter.



Bottom
Hardware installed in the bottom part of the shutter.




Invisible
The solution that allows the creation of the wall mounted sliding doors with an invisible sliding system.

• SOFT-CLOSE




Soft close device for soft opening and closing. Aluminum body, silent, integrated in the track and ultra-compact for installation also on narrow door leaf.


• DESIGN



Inset
The shutters do not overlap the lower or upper part of the cabinet.




Bottom overlay shutter
The shutters overlap the lower part of the cabinet.




Fully overlapping shutters
The shutters overlap both the top and bottom of the cabinet.

Pivot sliding door systems for furnitures and wardrobes


• APPLICATION




Pivot sliding door pocket fitting
In the open position the shutters can be hidden in a niche on the side of the cabinet.



• DESIGN



Pivot sliding door pocket fitting
Single door leaf version



Pivot sliding door pocket fitting
Double door leaf version

• PRE-ASSEMBLED



Quick and easy installation
The system is supplied pre-assembled and therefore ready to be fixed on the side of the cabinet.

SLIDING SYSTEMS

for furnitures and wardrobes




| System | Design | Maximum load capacity | Door thickness | Soft-close | Sliding | Page |
|--------|---|-----------------------|----------------|------------|--|------|
| Tricks | Fully overlapping shutters  | 50 kg | minimum 40 mm | No | Invisible  | 10 |
| 1050 | Inset  | 120 kg | minimum 18 mm | Yes | Top  | 14 |
| 0350 | Inset  | 15 kg | minimum 18 mm | No | Top  | 22 |
| 1011 | Inset  | 40 kg | minimum 18 mm | No | Top  | 26 |
| 0105 | Inset  | 60 kg | minimum 20 mm | No | Bottom  | 36 |
| 0310 | Inset  | 43 kg | minimum 16 mm | No | Bottom  | 40 |
| 0320 | Inset  | 40 kg | minimum 16 mm | No | Bottom  | 46 |






TERMS AND DEFINITIONS


• DESIGN

**Inset**

The shutters do not overlap the lower or upper part of the cabinet.

**Bottom overlay shutter**

The shutters overlap the lower part of the cabinet.

**Fully overlapping shutters**


The shutters overlap both the top and bottom of the cabinet.

• SOFT-CLOSE




Soft close device for soft opening and/or closing. Aluminum body, silent, integrated in the track and ultra-compact for installation also on narrow door leaf.


• SLIDING

**Top**

Hardware installed in the top part of the shutter.


**Bottom**

Hardware installed in the bottom part of the shutter.


**Invisible**

The solution that allows the creation of the wall mounted sliding doors with an invisible sliding system.

• VERTICAL ADJUSTMENT







• DEPTH ADJUSTMENT



SYSTEM TRICKS

PATENTED

| | | | | | | |
|---|---|---|--|--|---|--|
| <p>SLIDING Invisible</p>  | <p>DESIGN Fully overlapping shutters</p>  | <p>LOAD CAPACITY up to 50 kg</p>  | <p>DOOR LEAF THICKNESS</p>  <p>minimum 40 mm</p> | <p>DOOR LEAF MATERIAL Wood</p>  | <p>FLOOR WHEEL Missing</p>  | <p>3D ADJUSTMENTS</p>  |
| <p>ALSO SUITABLE FOR DOORS</p>  | | | | | | |



INDEX

A sliding set for system Tricks

| Set | Maximum load capacity | Door thickness | Sliding | Soft-close | Page |
|--|-----------------------|----------------|--|------------|------|
| 0590 1 | 50 kg | minimum 40 mm | Invisible  | No | 12 |
| Tracks, Accessories and Spare parts 0590 1 | | | | | 13 |




KIT 0590 1 - TRICKS

Panel system sliding outside the wall with invisible hardware. No floor wheels. Lower clearance of 10 mm. 3D adjustments.

| | | | | | | |
|-------------------------------------|---|---|--|---|---------------------------------------|------------------------------|
| <p>SLIDING Invisible</p> | <p>DESIGN Fully overlapping shutters</p> | <p>LOAD CAPACITY up to 50 kg</p> | <p>DOOR LEAF THICKNESS</p> <p>minimum 40 mm</p> | <p>DOOR LEAF MATERIAL Wood</p> | <p>FLOOR WHEEL Missing</p> | <p>3D ADJUSTMENTS</p> |
|-------------------------------------|---|---|--|---|---------------------------------------|------------------------------|

ALSO SUITABLE FOR DOORS

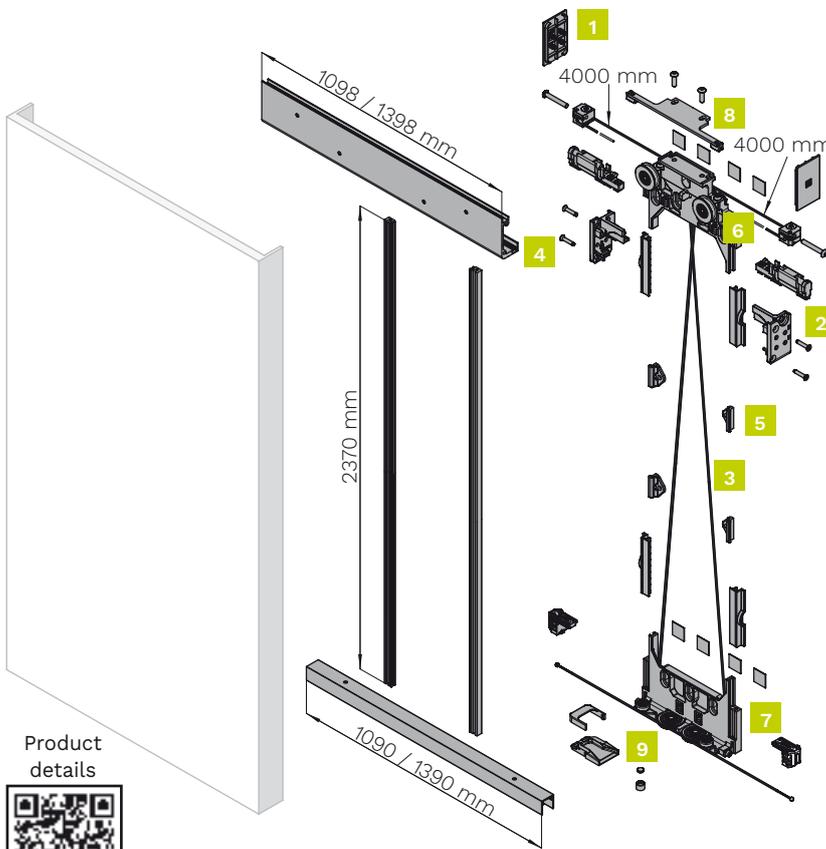

Kit components

1 door set
Item number: 0590 1

| Figure | Component | Quantity |
|--------|--|----------|
| 1 | Kit with plastic components | 1 piece |
| 2 | Kit damper | 1 piece |
| 3 | Cable kit | 1 piece |
| 4 | Upper brackets right and left | 2 pieces |
| 5 | Cable stop upper clamps right and left | 2 pieces |
| 6 | Upper roller | 1 piece |
| 7 | Lower roller | 1 piece |
| 8 | Anti-derailment safety bracket | 1 piece |
| 9 | Lower guide | 1 piece |


Complete the set in the section "Tracks, Accessories and Spare parts".

Product details





Technical drawings

Dimensions indicated in millimeters

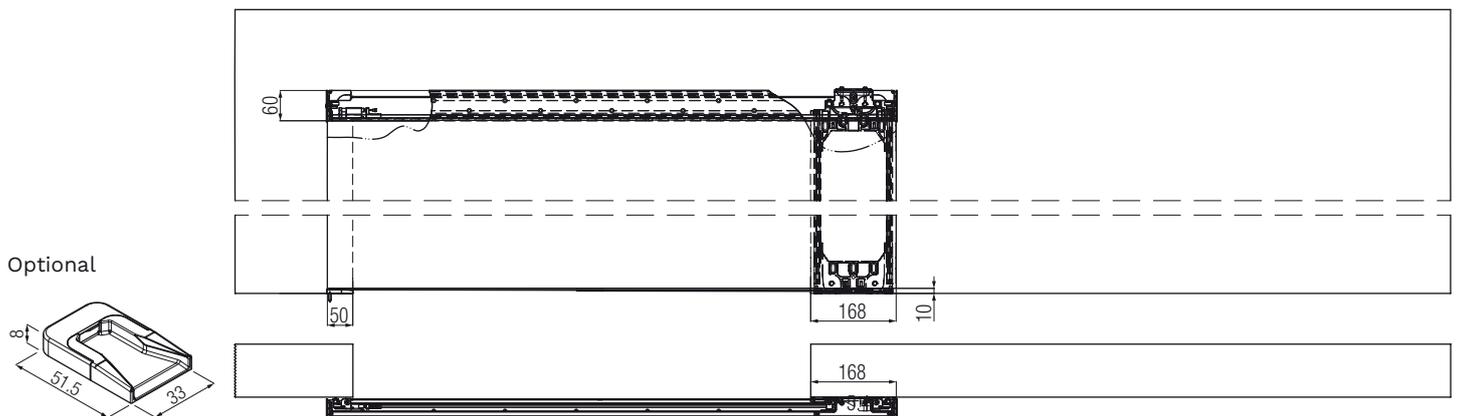

Tracks, Accessories and Spare parts 0590 1

Complet kit with track.
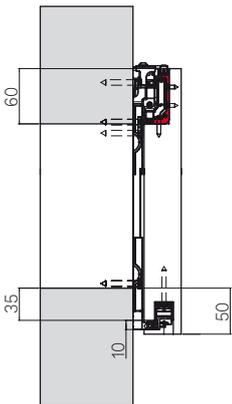
| Installation examples | Dimensions tracks |
|--|--|
| <p>Dimensions indicated in millimeters</p>  |  <p>50 kg</p> |

Accessories

| Upper track, lower track and vertical connection uprights | Item number. |
|---|----------------------------|
| Aluminum profile Kit to cut for wall opening up to 900mm wide and up to 2450mm high | 0590 900 2450 |
| Aluminum profile kit to cut for wall opening up to 1200mm wide and up to 2450mm high | 0590 1200 2450 |
| Aluminum profile Kit "Pre-cut to size" for wall opening up to 1200mm wide and up to 2450mm high | 0590 1200 2450 F.M. |





Spare parts

| Component | *Quantity | Item number. | Which set is it for? |
|-------------------------------|-----------|----------------|----------------------|
| Kit with plastic components | 1 piece | 0590 01 | 0590 1 |
| Kit damper | 2 pieces | 0590 02 | 0590 1 |
| Cable kit | 2 pieces | 0590 03 | 0590 1 |
| Aluminum uprights | 1 piece | 0590 04 | 0590 1 |
| Upper brackets right and left | 2 pieces | 0590 05 | 0590 1 |

*The minimum order quantity is indicated.







SYSTEM 1050 PATENTED

| | | | | | | |
|--|--|--|--|---|--|---|
| <p>SLIDING Top</p>  | <p>DESIGN Inset</p>  | <p>LOAD CAPACITY maximum 120 kg per shutter</p>  | <p>NUMBER OF DOOR LEAF</p>  <p>1 - 2 - 3 - 4</p> | <p>DOOR LEAF THICKNESS</p>  <p>minimum 18 mm</p> | <p>VERTICAL ADJUSTMENT</p>  <p>+3 -3</p> | <p>DEPTH ADJUSTMENT</p>  <p>+2.5 -2.5</p> |
| <p>SOFT-CLOSE</p> <p>ABS </p> <p>DOUBLE</p> <p>Covering: Steel</p> | | | | | | |



INDEX

A sliding set for system 1050


| Set | Maximum load capacity | Door thickness | Sliding | Design | Soft-close | Page |
|---|-----------------------|----------------|---|---|------------|------|
| 1050 1 | 60 kg | minimum 18 mm |  |  | No | 16 |
| 1050 1 60 ABS | 60 kg | minimum 18 mm |  |  | Yes | 17 |
| Tracks, Accessories and Spare parts 1050 1 / 1050 1 60 ABS | | | | | | 18 |
| 1050 2 | 120 kg | minimum 18 mm |  |  | No | 19 |
| 1050 2 120 ABS | 120 kg | minimum 18 mm |  |  | Yes | 20 |
| Tracks, Accessories and Spare parts 1050 2 120 / 1050 2 120 ABS | | | | | | 21 |



KIT 1050 1 PATENTED

Sliding Furniture kit with top sliding, inset shutter device and load capacity up to 60kg per shutter.

| | | | | | |
|--|--------------------------------|--|---|---|---|
| | SLIDING Top | DESIGN Inset | LOAD CAPACITY maximum 60 kg per shutter | NUMBER OF DOOR LEAF 1 - 2 - 3 - 4 | DOOR LEAF THICKNESS minimum 18 mm |
| | VERTICAL ADJUSTMENT | DEPTH ADJUSTMENT +2.5 -2.5 | | | |

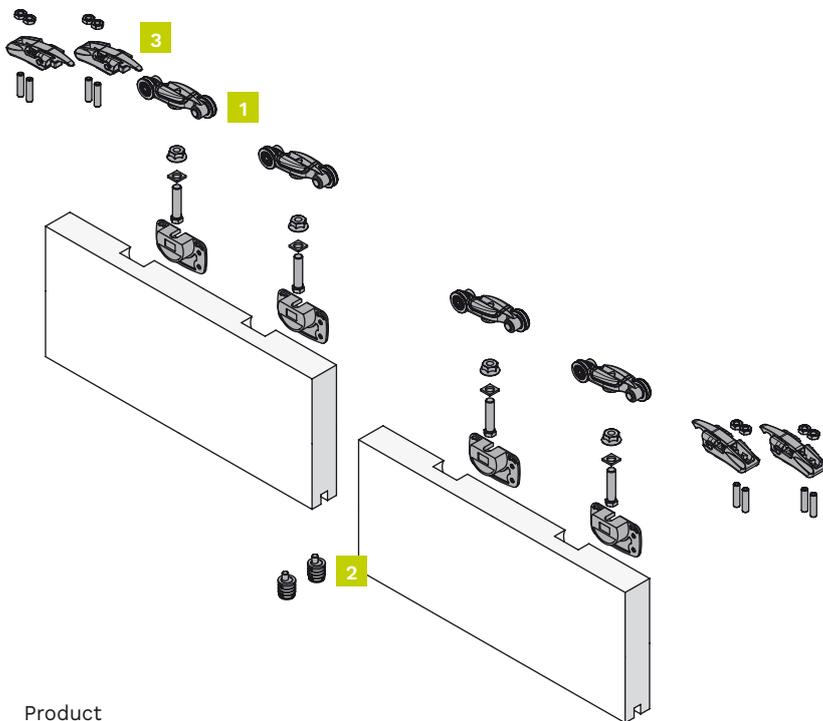

Kit components

1 door set

Item number: 1050 1

| Figure | Component | Quantity |
|--------|---|----------|
| 1 | Upper roller with bracket - 60 kg | 2 pieces |
| 2 | Adjustable floor guide | 1 piece |
| 3 | End-stop with adjustable unfasten force | 2 pieces |


Complete the set in the section "Tracks, Accessories and Spare parts".

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

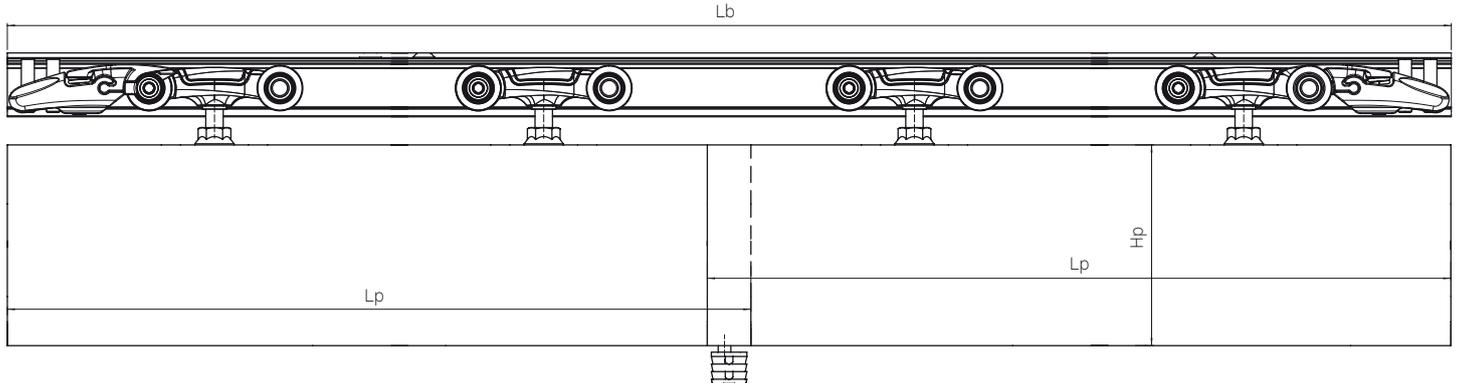

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter




KIT 1050 1 60 ABS

PATENTED

Sliding Furniture set with top sliding, inset shutter design, double side damper and load capacity up to 60kg per shutter.

| | | | | | |
|--|--|--|---|---|---|
| | SLIDING Top | DESIGN Inset | LOAD CAPACITY maximum 60 kg per shutter | NUMBER OF DOOR LEAF 1 - 2 - 3 - 4 | DOOR LEAF THICKNESS minimum 18 mm |
| | DOOR LEAF WIDTH minimum 650 mm | VERTICAL ADJUSTMENT +3 -3 | DEPTH ADJUSTMENT +2.5 -2.5 | SOFT-CLOSE ABS DOUBLE Covering: Steel | |

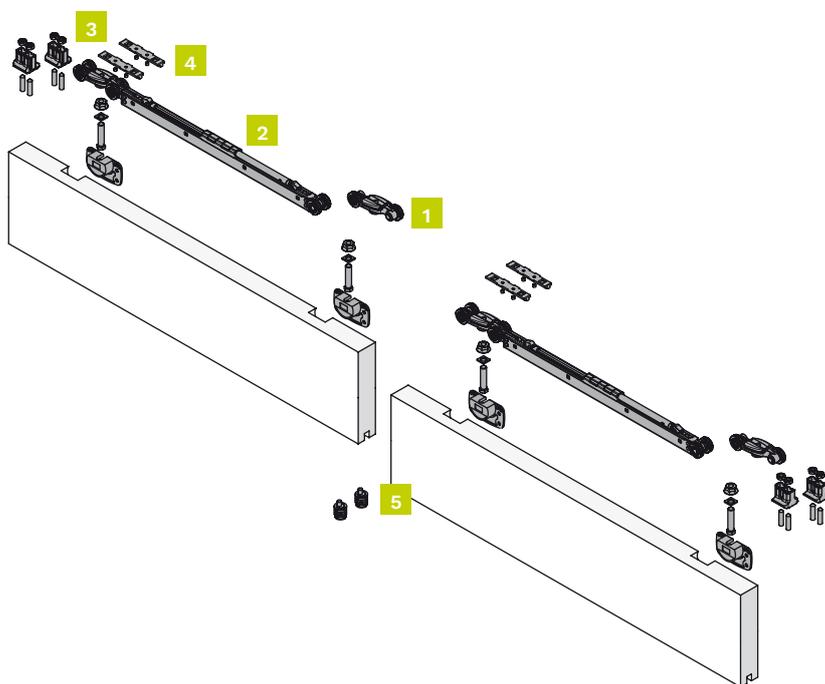

Kit components

1 door set

Item number: 1050 1 60 ABS

| Figure | Component | Quantity |
|--------|--|----------|
| 1 | Upper roller with bracket - 60 kg | 1 piece |
| 2 | Roller with bracket and double side damper - 60 kg | 1 piece |
| 3 | End-stop Double ABS | 2 pieces |
| 4 | Activator Double ABS | 2 pieces |
| 5 | Adjustable floor guide | 1 piece |


Complete the set in the section "Tracks, Accessories and Spare parts".

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

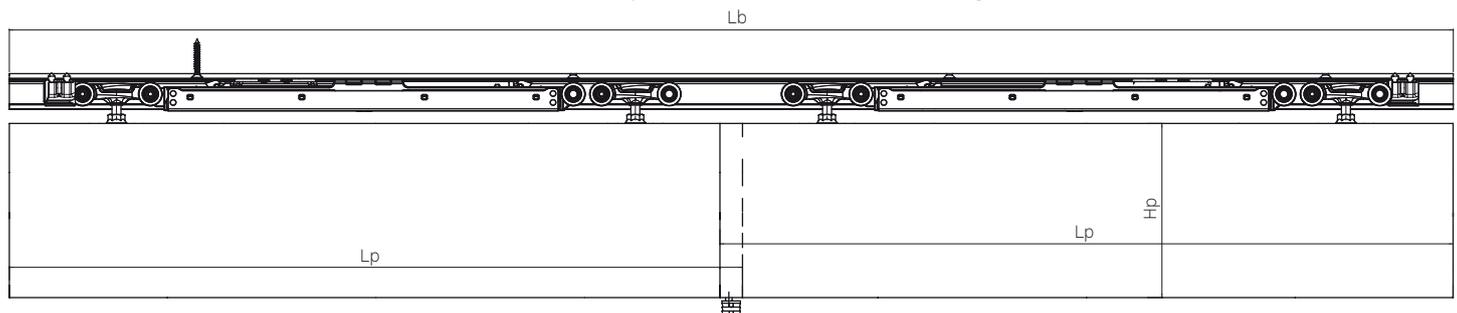

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter



Tracks, Accessories and Spare parts 1050 1 / 1050 1 60 ABS


Complete the kit with track and accessory according to application.

Installation examples

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.


Double track

Thickness from 18 up to 22 mm

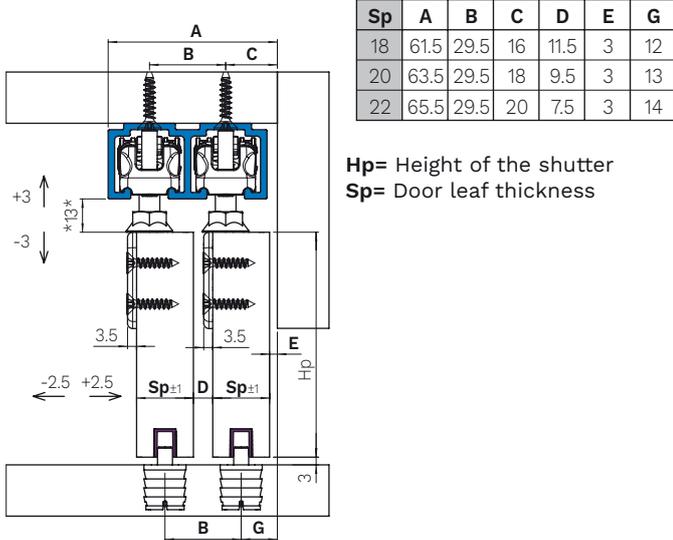


Single track

Thickness from 18 up to 32 mm

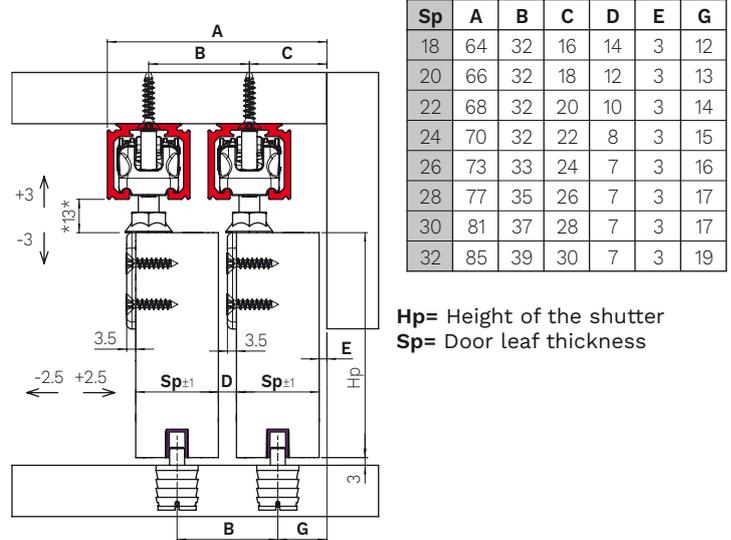

Dimensions tracks

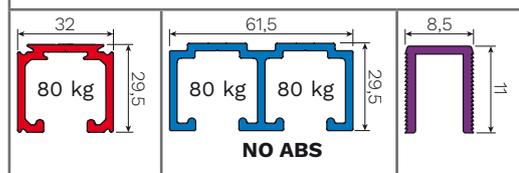

Tracks

| Upper aluminium track for single door, silver anodized - 80 kg | Item number. |
|--|-----------------|
| Door leaf thickness from 18 mm to 32 mm (panels with 80kg max weight each) | |
| 1,8 meters | 0500 180 |
| 2 meters | 0500 200 |
| 2,4 meters | 0500 240 |
| 3 meters | 0500 300 |
| 4 meters | 0500 400 |
| 6 meters | 0500 1 |

Tracks

| Anodized upper aluminium track for double door - 80 kg + 80 kg | Item number. |
|---|---------------|
| Door leaf thickness from 18 mm to 22 mm (No kit ABS) (n.2 panels with 80kg max weight each) | |
| 3 meters | 1040 2 |
| 6 meters | 1040 1 |
| Lower nylon guide track | Item number. |
| 2 meters | 1000 5 |

Accessories

| Component | Item number. |
|--------------------------------------|---------------|
| Door straightener for cabinet panels | 0910 9 |

Spare parts


| Component | *Quantity | Item number. | Which set is it for? |
|---|-----------|----------------|------------------------|
| Adjustable floor guide | 1 piece | 1010 13 | 1050 1 / 1050 1 60 ABS |
| End-stop with adjustable unfasten force | 2 pieces | 0500 12 | 1050 1 |

*The minimum order quantity is indicated.

KIT 1050 2 PATENTED

Sliding Furniture set with top sliding, inset shutter design and load capacity up to 120kg per shutter.

| | | | | | |
|--|--------------------------------|--|--|---|---|
| | SLIDING Top | DESIGN Inset | LOAD CAPACITY maximum 120 kg per shutter | NUMBER OF DOOR LEAF 1 - 2 - 3 - 4 | DOOR LEAF THICKNESS minimum 18 mm |
| | VERTICAL ADJUSTMENT | DEPTH ADJUSTMENT +2.5 -2.5 | | | |

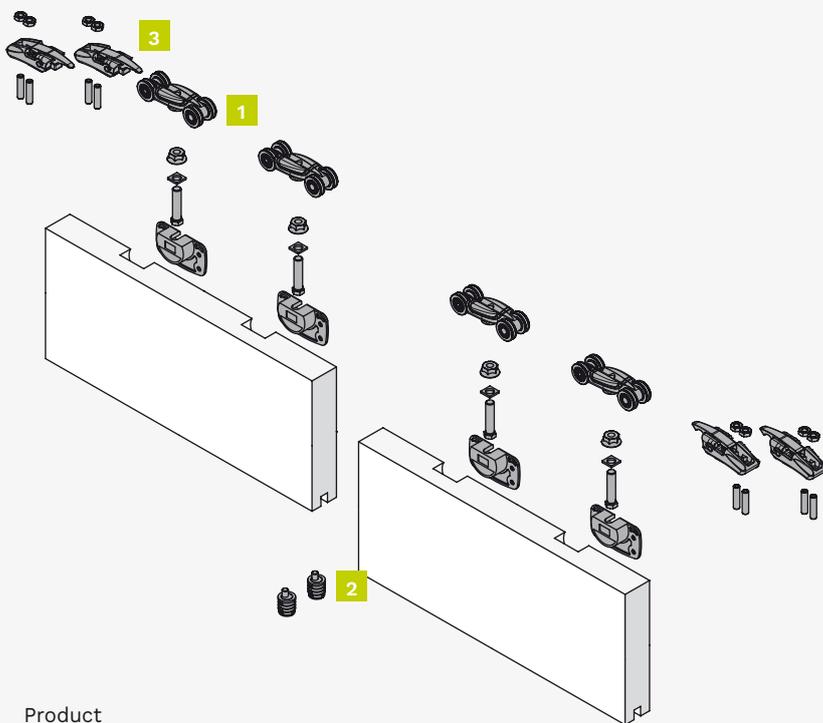

Kit components

1 door set
Item number: 1050 2

| Figure | Component | Quantity |
|--------|---|----------|
| 1 | Upper roller with bracket - 120 kg | 2 pieces |
| 2 | Adjustable floor guide | 1 piece |
| 3 | End-stop with adjustable unfasten force | 2 pieces |


Complete the set in the section "Tracks, Accessories and Spare parts".

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

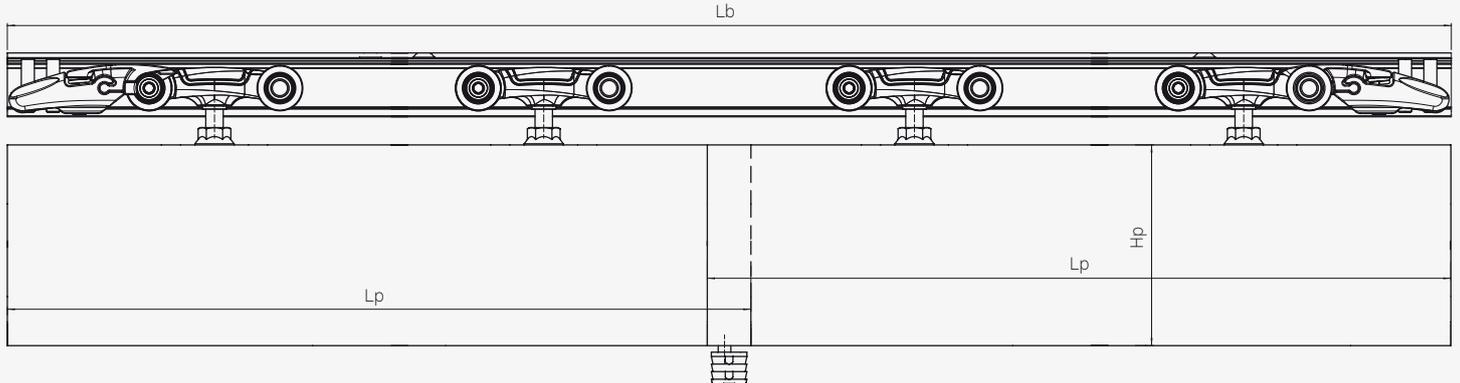

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter




KIT 1050 2 120 ABS

PATENTED

Sliding Furniture set with top sliding, inset shutter design, double side damper and load capacity up to 120kg per shutter.

| | | | | | |
|--|--|--|--|---|---|
| | SLIDING Top | DESIGN Inset | LOAD CAPACITY maximum 120 kg per shutter | NUMBER OF DOOR LEAF 1 - 2 - 3 - 4 | DOOR LEAF THICKNESS minimum 18 mm |
| | DOOR LEAF WIDTH minimum 650 mm | VERTICAL ADJUSTMENT +3 -3 | DEPTH ADJUSTMENT +2.5 -2.5 | SOFT-CLOSE ABS DOUBLE Covering: Steel | |

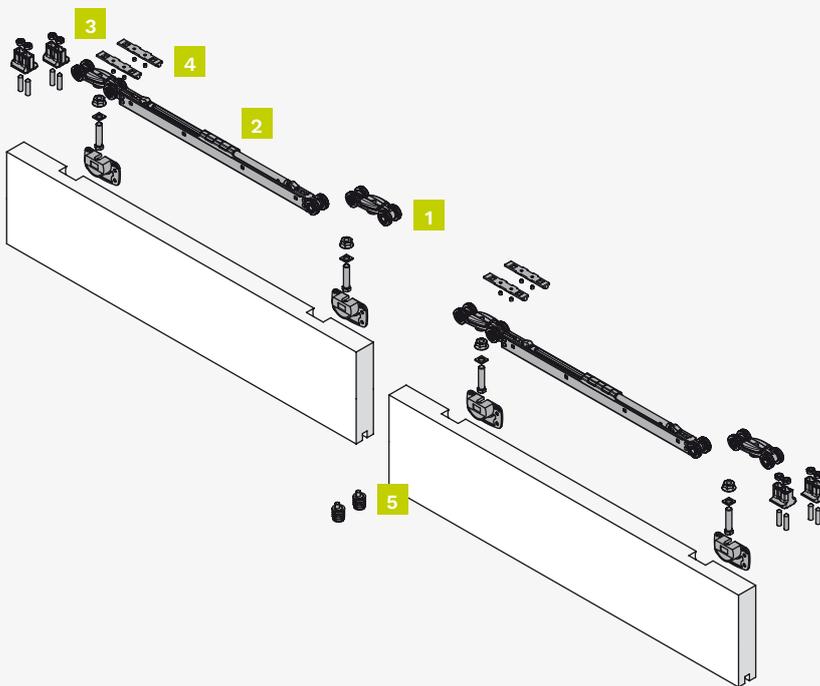

Kit components

1 door set

Item number: 1050 2 120 ABS

| Figure | Component | Quantity |
|--------|---|----------|
| 1 | Upper roller with bracket - 120 kg | 1 piece |
| 2 | Roller with bracket and double side damper - 120 kg | 1 piece |
| 3 | End-stop Double ABS | 2 pieces |
| 4 | Activator Double ABS | 2 pieces |
| 5 | Adjustable floor guide | 1 piece |


Complete the set in the section "Tracks, Accessories and Spare parts".

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

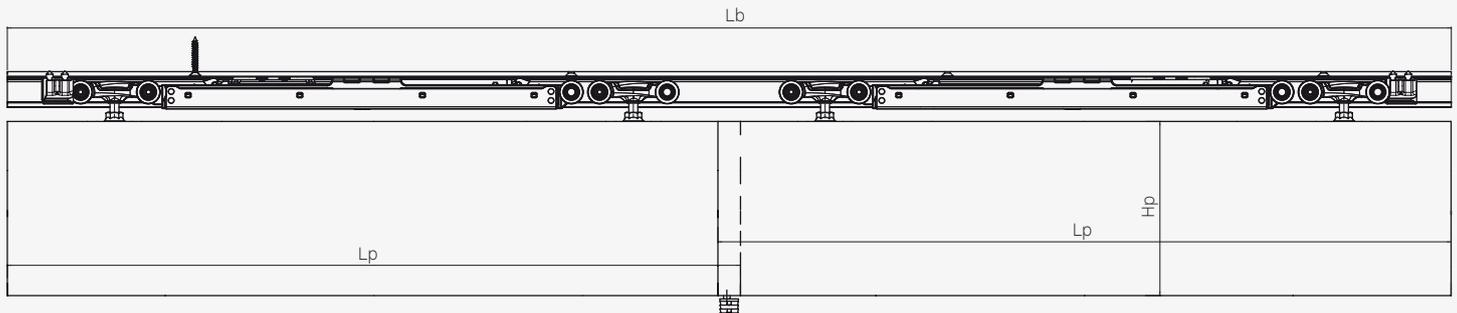

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter



Tracks, Accessories and Spare parts 1050 2 / 1050 2 120 ABS

Complete the kit with track and accessory according to application.

Installation examples

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

Double track
Thickness from 18 up to 22 mm

| Sp | A | B | C | D | E | G |
|----|------|------|----|------|---|----|
| 18 | 61.5 | 29.5 | 16 | 11.5 | 3 | 12 |
| 20 | 63.5 | 29.5 | 18 | 9.5 | 3 | 13 |
| 22 | 65.5 | 29.5 | 20 | 7.5 | 3 | 14 |

Hp= Height of the shutter
Sp= Door leaf thickness

Single track
Thickness from 18 up to 32 mm

Table 120kg track

| Sp | A | B | C | D | E | G |
|----|------|----|------|----|-----|------|
| 18 | 66 | 33 | 16.5 | 15 | 3.5 | 12.5 |
| 20 | 67.5 | 33 | 18 | 13 | 3 | 13 |
| 22 | 69.5 | 33 | 20 | 11 | 3 | 14 |
| 24 | 71.5 | 33 | 22 | 9 | 3 | 14.5 |
| 26 | 73.5 | 33 | 24 | 7 | 3 | 16 |
| 28 | 77.5 | 35 | 26 | 7 | 3 | 17 |
| 30 | 81.5 | 37 | 28 | 7 | 3 | 17 |
| 32 | 85.5 | 39 | 30 | 7 | 3 | 19 |

Table 80kg track

| Sp | A | B | C | D | E | G |
|----|----|----|----|----|---|----|
| 18 | 64 | 32 | 16 | 14 | 3 | 12 |
| 20 | 66 | 32 | 18 | 12 | 3 | 13 |
| 22 | 68 | 32 | 20 | 10 | 3 | 14 |
| 24 | 70 | 32 | 22 | 8 | 3 | 15 |
| 26 | 73 | 33 | 24 | 7 | 3 | 16 |
| 28 | 77 | 35 | 26 | 7 | 3 | 17 |
| 30 | 81 | 37 | 28 | 7 | 3 | 17 |
| 32 | 85 | 39 | 30 | 7 | 3 | 19 |

Example with 120kg track

Dimensions tracks

| Tracks | |
|---|---------------------|
| Upper aluminium track for single door, silver anodized - 120 kg Door leaf thickness from 18 mm to 32 mm | Item number. |
| 3 meters | 0500 10 300 |
| 6 meters | 0500 10 |
| Upper aluminium track for single door, silver anodized - 80 kg Door leaf thickness from 18 mm to 32 mm (panels with 80kg max weight each) | Item number. |
| 1,8 meters | 0500 180 |
| 2 meters | 0500 200 |
| 2,4 meters | 0500 240 |
| 3 meters | 0500 300 |
| 4 meters | 0500 400 |
| 6 meters | 0500 1 |




| Tracks | |
|---|---------------------|
| Anodized upper aluminium track for double door - 80 kg + 80 kg Door leaf thickness from 18 mm to 22 mm (No kit ABS) (n.2 panels with 80kg max weight each) | Item number. |
| 3 meters | 1040 2 |
| 6 meters | 1040 1 |
| Lower nylon guide track | Item number. |
| 2 meters | 1000 5 |

| Accessories | |
|--------------------------------------|---------------------|
| Component | Item number. |
| Door straightener for cabinet panels | 0910 9 |

| Spare parts | | | |
|---|------------------|---------------------|-----------------------------|
| Component | *Quantity | Item number. | Which set is it for? |
| Adjustable floor guide | 1 piece | 1010 13 | 1050 2 / 1050 2 120 ABS |
| End-stop with adjustable unfasten force | 2 pieces | 0500 12 | 1050 2 |

*The minimum order quantity is indicated.


SYSTEM 0350

| | | | | | | |
|---|--|---|---|---|--|---|
| <p>SLIDING Top</p>  | <p>DESIGN Inset</p>  | <p>REDUCED LOWER CLEARANCE</p>  | <p>LOAD CAPACITY maximum 15 kg per shutter</p>  | <p>NUMBER OF DOOR LEAF</p>  <p>1 - 2 - 3 - 4</p> | <p>DOOR LEAF THICKNESS</p>  <p>minimum 18 mm</p> | <p>VERTICAL ADJUSTMENT</p>  |
| <p>FIXING SCREWS Fixing screws Included</p>  | | | | | | |



INDEX

A sliding set for system 0350


| Set | Maximum load capacity per shutter | Door thickness | Sliding | Design | Soft-close | Page |
|--|-----------------------------------|----------------|---|---|------------|------|
| 0350 4 | 15 kg | minimum 18 mm |  |  | No | 24 |
| Tracks, Accessories and Spare parts 0350 4 | | | | | | 25 |



KIT 0350 4

Sliding Furniture set with top sliding, inset shutter design and load capacity up to 15kg per shutter.

| | | | | | |
|--|---|--|--|---|---|
| | SLIDING Top | DESIGN Inset | REDUCED LOWER CLEARANCE | LOAD CAPACITY maximum 15 kg per shutter | NUMBER OF DOOR LEAF 1 - 2 - 3 - 4 |
| | DOOR LEAF THICKNESS minimum 18 mm | VERTICAL ADJUSTMENT +1 -1 | FIXING SCREWS Fixing screws Included | | |

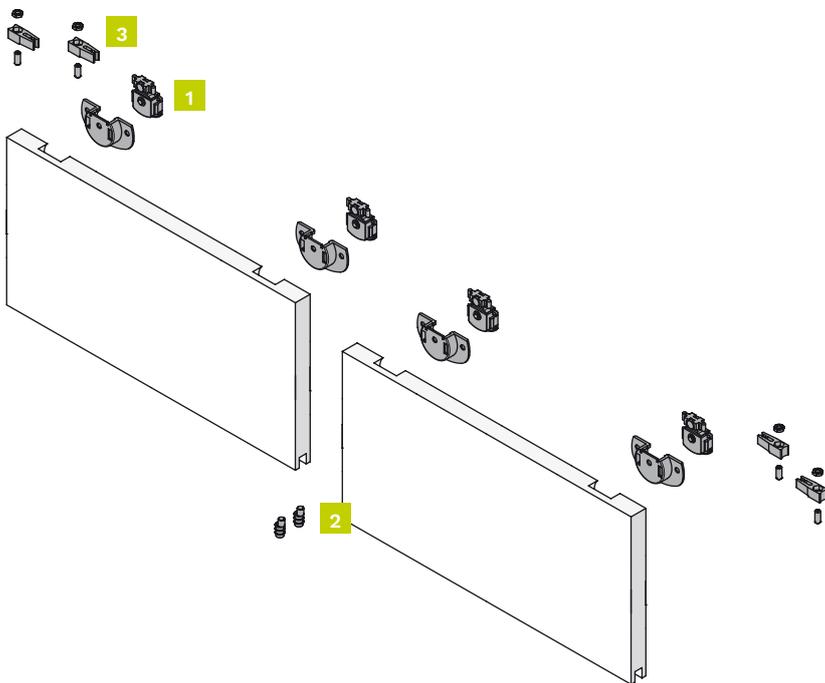

Kit components

2 doors set

Item number: 0350 4

| Figure | Component | Quantity |
|--------|------------------------|----------|
| 1 | Upper roller - 15 kg | 4 pieces |
| 2 | Adjustable floor guide | 2 pieces |
| 3 | End-stop | 4 pieces |
| - | Valve seat wrench | 1 piece |


Complete the set in the section "Tracks, Accessories and Spare parts".

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

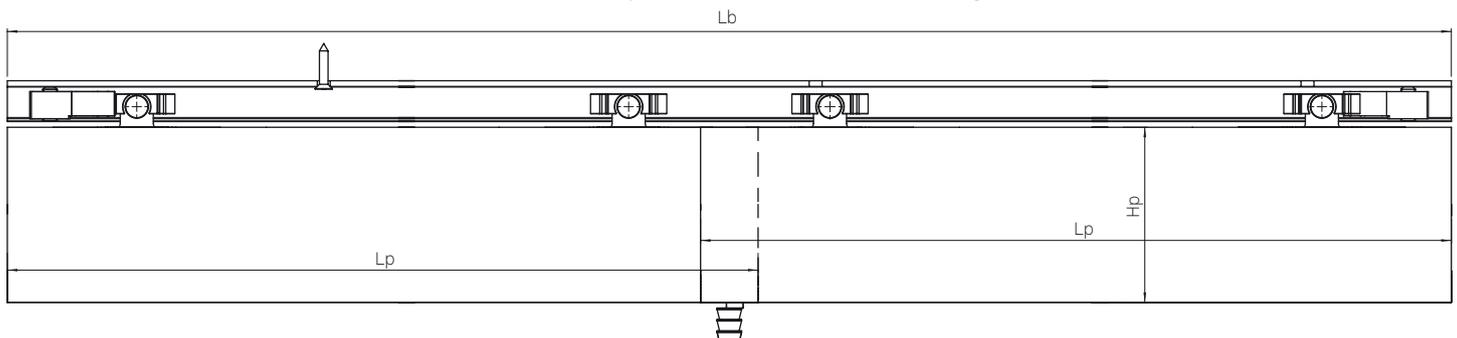

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter




Tracks, Accessories and Spare parts 0350 4

Complete the kit with track and accessory according to application.

Installation examples


Dimensions indicated in millimeters and are related to up to 15 kg track. You can find the complete dimensions in the mounting instructions.

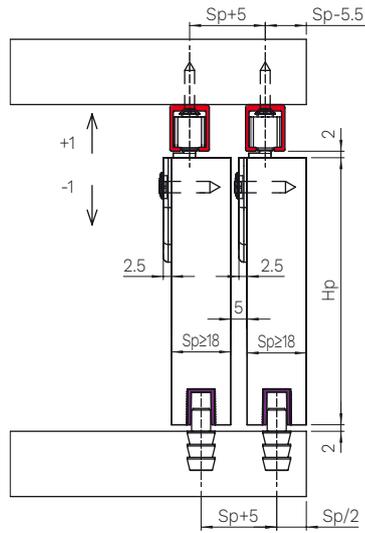

Hp= Height of the shutter - **Sp**= Door leaf thickness

Note: For different thicknesses please contact Krona Koblenz or visit the website.

Dimensions tracks



Tracks

| Upper drilled aluminium track - Raw | Item number. |
|--|---------------|
| 3 meters | 0350 2 |
| Upper drilled aluminium track - Anodized | Item number. |
| 2 meters | 0350 6 |
| Lower nylon guide track | Item number. |
| 2 meters | 1000 5 |

Accessories

| Component | Item number. |
|--------------------------------------|---------------|
| Door straightener for cabinet panels | 0910 9 |



Spare parts

| Component | *Quantity | Item number. | Which set is it for? |
|------------------------|-----------|----------------|----------------------|
| Upper roller - 15 kg | 2 pieces | 0350 51 | 0350 4 |
| Adjustable floor guide | 1 piece | 0350 52 | 0350 4 |
| End-stop | 2 pieces | 0260 54 | 0350 4 |

*The minimum order quantity is indicated.







SYSTEM 1011

| | | | | | |
|---|--|---|--|--|--|
| <p>SLIDING Top</p>  | <p>DESIGN Inset</p>  | <p>LOAD CAPACITY maximum 40 kg per shutter</p>  | <p>NUMBER OF DOOR LEAF</p>  <p>1 - 2 - 3 - 4</p> | <p>DOOR LEAF THICKNESS</p>  <p>minimum 18 mm</p> | <p>VERTICAL ADJUSTMENT</p>  <p>+3 -3</p> |
|---|--|---|--|--|--|



INDEX







A sliding set for system 1011


| Set | Maximum load capacity per shutter | Door thickness | Sliding | Design | Soft-close | Page |
|---|-----------------------------------|----------------|--|--|------------|------|
| 1011 5 | 20 kg | minimum 18 mm |  |  | No | 28 |
| Tracks, Accessories and Spare parts 1011 5 | | | | | | 29 |
| 1011 11 | 20 kg | minimum 22 mm |  |  | No | 30 |
| Tracks, Accessories and Spare parts 1011 11 | | | | | | 31 |
| 1011 8 | 40 kg | minimum 18 mm |  |  | No | 32 |
| Tracks, Accessories and Spare parts 1011 8 | | | | | | 33 |
| 1011 10 | 40 kg | minimum 22 mm |  |  | No | 34 |
| Tracks, Accessories and Spare parts 1011 10 | | | | | | 35 |



KIT 1011 5

Sliding Furniture set with top sliding, inset shutter design and load capacity up to 20kg per shutter.
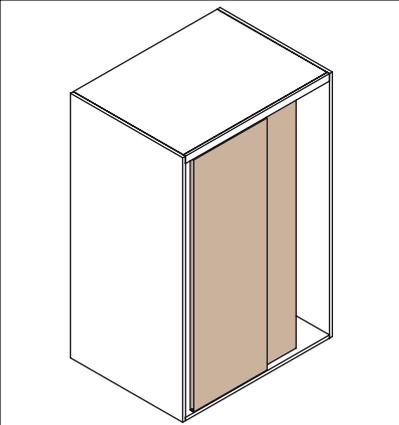
| | | | | | |
|--|---|---|--|--|--|
|  | SLIDING Top  | DESIGN Inset  | LOAD CAPACITY maximum 20 kg per shutter  | NUMBER OF DOOR LEAF  1 - 2 - 3 - 4 | DOOR LEAF THICKNESS  minimum 18 mm |
| | VERTICAL ADJUSTMENT  | | | | |

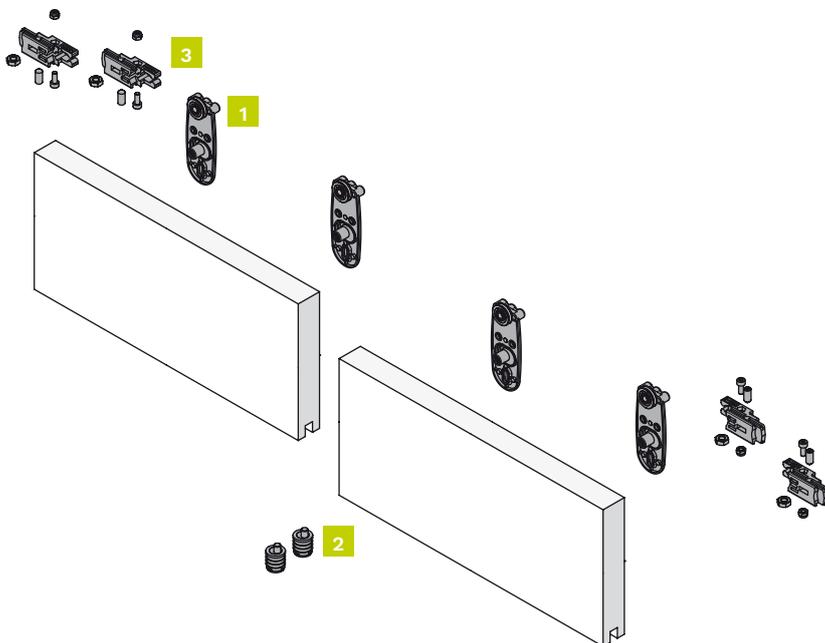

Kit components

Complete kit for an internal or external shutter
Item number: 1011 5 (= 2 x art. 1011 7)

| Figure | Component | Quantity |
|--------|------------------------|----------|
| 1 | Upper roller - 20 kg | 4 pieces |
| 2 | Adjustable floor guide | 2 pieces |
| 3 | Adjustable end-stop | 4 pieces |

What should I order?

| Door leaf | Set |
|-----------|-----------------------------------|
| n° 1 | 1 x art. 1011 7 |
| n° 2 | 1 x art. 1011 5 |
| n° 3 | 1 x art. 1011 5 + 1 x art. 1011 7 |
| n° 4 | 1 x art. 1011 5 + 1 x art. 1011 5 |

Complete the set in the section "Tracks, Accessories and Spare parts".


Number of shutters: purchase one kit for each shutter and choose between internal or external shutter.

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

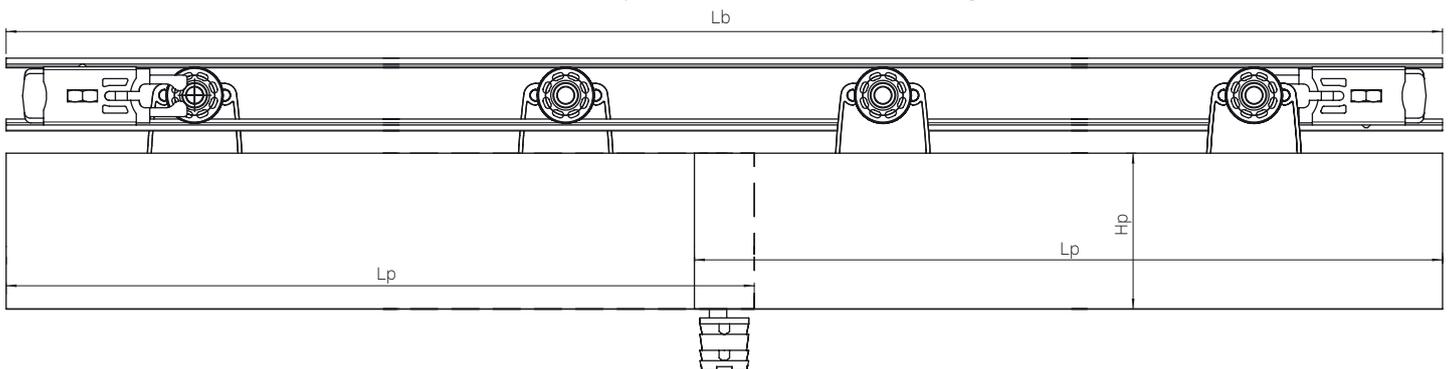

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter



Tracks, Accessories and Spare parts 1011 5


Complete the kit with track and accessory according to application.

Installation examples

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

Double track

Thickness from 18 up to 20 mm

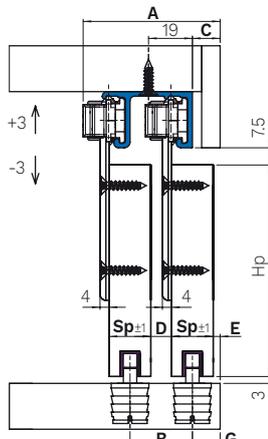


| Sp | A | B | C | D | E | G |
|----|----|----|----|---|---|----|
| 18 | 59 | 25 | 12 | 9 | 3 | 12 |
| 20 | 60 | 27 | 13 | 7 | 2 | 12 |

Hp= Height of the shutter
Sp= Door leaf thickness

Single track


Thickness from 18 up to 32 mm

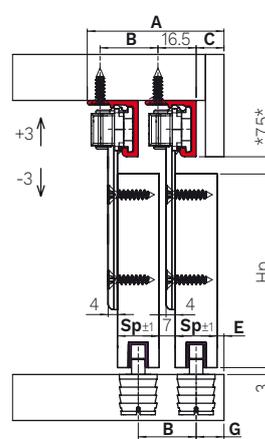

| Sp | A | B | C | E | G |
|----|----|----|----|---|----|
| 18 | 59 | 25 | 12 | 3 | 12 |
| 20 | 62 | 27 | 13 | 2 | 12 |
| 22 | 65 | 29 | 14 | 1 | 12 |
| 24 | 68 | 31 | 15 | 0 | 12 |
| 26 | 72 | 33 | 17 | 0 | 13 |
| 28 | 76 | 35 | 19 | 0 | 14 |
| 30 | 80 | 37 | 21 | 0 | 15 |
| 32 | 84 | 39 | 23 | 0 | 16 |

Hp= Height of the shutter
Sp= Door leaf thickness

Dimensions tracks

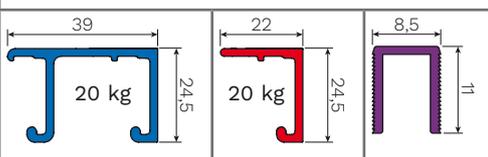

Tracks

| Double aluminum upper profile | Item number. |
|-------------------------------|---------------|
| 3 meters | 1010 2 |
| 6 meters | 1010 1 |
| Single aluminum upper profile | Item number. |
| 3 meters | 1010 4 |
| 6 meters | 1010 3 |
| Lower nylon guide track | Item number. |
| 2 meters | 1000 5 |

Accessories

| Component | Item number. |
|--------------------------------------|----------------|
| Door straightener for cabinet panels | 0910 9 |
| Stopper for third door | 1010 25 |








Spare parts


| Component | *Quantity | Item number. | Which set is it for? |
|------------------------|-----------|----------------|----------------------|
| Upper roller - 20 kg | 2 pieces | 1011 1 | 1011 5 / 1011 7 |
| Adjustable floor guide | 1 piece | 1010 13 | 1011 5 / 1011 7 |
| Adjustable end-stop | 2 pieces | 1010 14 | 1011 5 / 1011 7 |

*The minimum order quantity is indicated.

KIT 1011 11

Sliding Furniture set with top sliding, inset shutter design and load capacity up to 20kg per shutter.
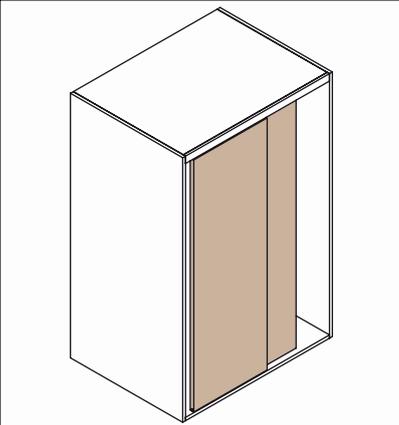
| | | | | | |
|--|---|---|---|--|--|
|  | SLIDING Top  | DESIGN Inset  | LOAD CAPACITY maximum 20 kg per shutter  | NUMBER OF DOOR LEAF  1 - 2 - 3 - 4 | DOOR LEAF THICKNESS  minimum 18 mm |
| | VERTICAL ADJUSTMENT  | | | | |

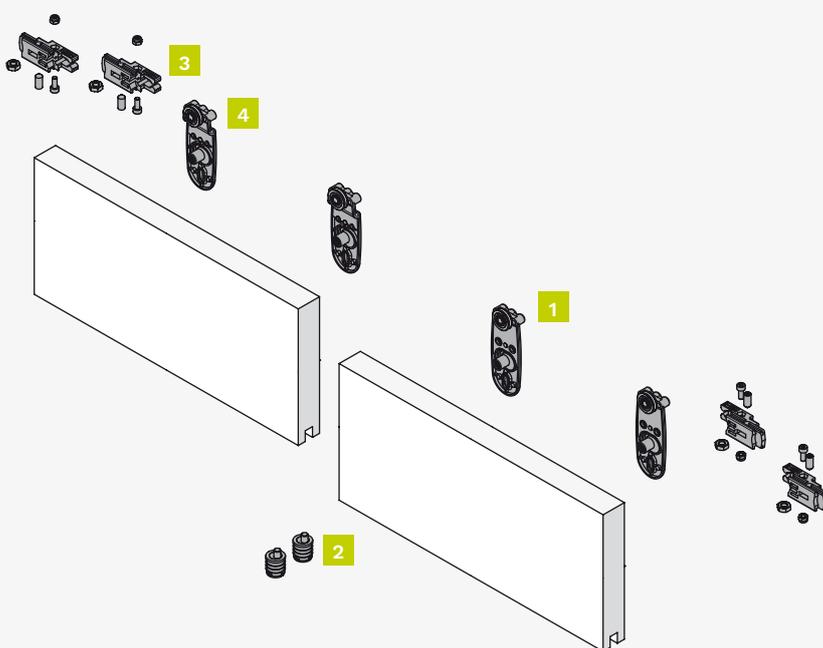

Kit components

Complete kit for an internal or external shutter
Item number: 1011 7

| Figure | Component | Quantity |
|--------|------------------------|----------|
| 1 | Upper roller - 20 kg | 2 pieces |
| 2 | Adjustable floor guide | 1 pieces |
| 3 | Adjustable end-stop | 2 pieces |

Complete kit for an internal shutter
Item number: 1011 11

| | | |
|---|-----------------------------|----------|
| 4 | Upper angled roller - 20 kg | 2 pieces |
| 2 | Adjustable floor guide | 1 pieces |
| 3 | Adjustable end-stop | 2 pieces |

What should I order?

| Door leaf | Set |
|-----------|------------------------------------|
| n° 2 | 1 x art. 1011 7 + 1 x art. 1011 11 |
| n° 3 | 1 x art. 1011 5 + 1 x art. 1011 11 |
| n° 3 | 1 x art. 1011 7 + 2 x art. 1011 11 |
| n° 4 | 1 x art. 1011 5 + 2 x art. 1011 11 |

Complete the set in the section "Tracks, Accessories and Spare parts".


Number of shutters: purchase one kit for each shutter and choose between internal or external shutter.

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

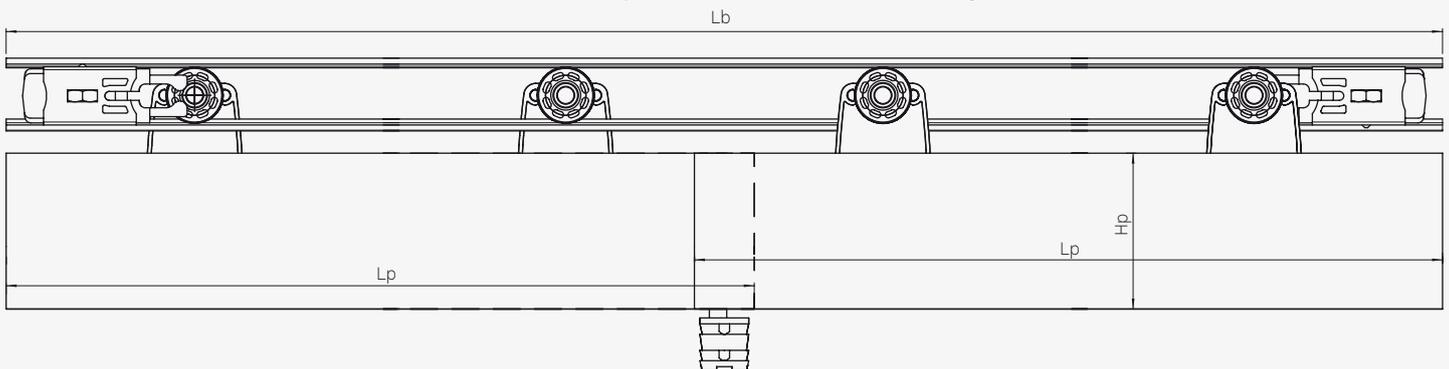

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter

Tracks, Accessories and Spare parts 1011 11


Complete the kit with track and accessory according to application.

Installation examples


Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

Double track

Thickness from 22 up to 24 mm

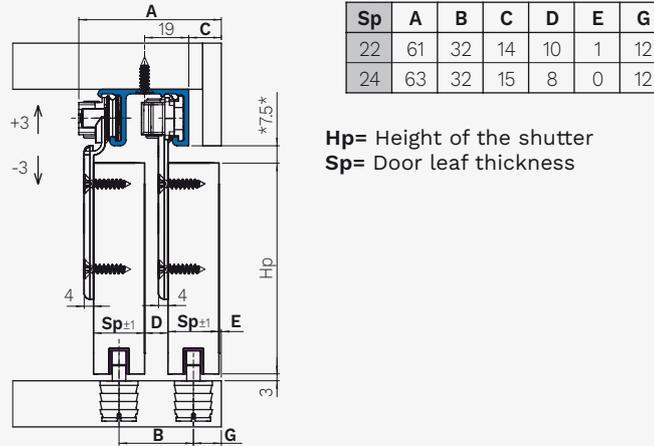

Dimensions tracks



Tracks

| Double aluminum upper profile | Item number. |
|-------------------------------|---------------|
| 3 meters | 1010 2 |
| 6 meters | 1010 1 |
| Lower nylon guide track | Item number. |
| 2 meters | 1000 5 |

Accessories

| Component | Item number. |
|--------------------------------------|----------------|
| Door straightener for cabinet panels | 0910 9 |
| Stopper for third door | 1010 25 |

Spare parts



| Component | *Quantity | Item number. | Which set is it for? |
|-----------------------------|-----------|----------------|----------------------|
| Upper angled roller - 20 kg | 2 pieces | 1011 3 | 1011 11 |
| Upper roller - 20 kg | 2 pieces | 1011 1 | 1011 7 |
| Adjustable floor guide | 1 piece | 1010 13 | 1011 7 / 1011 11 |
| Adjustable end-stop | 2 pieces | 1010 14 | 1011 7 / 1011 11 |

*The minimum order quantity is indicated.



KIT 1011 8

Sliding Furniture set with top sliding, inset shutter design and load capacity up to 40kg per shutter.

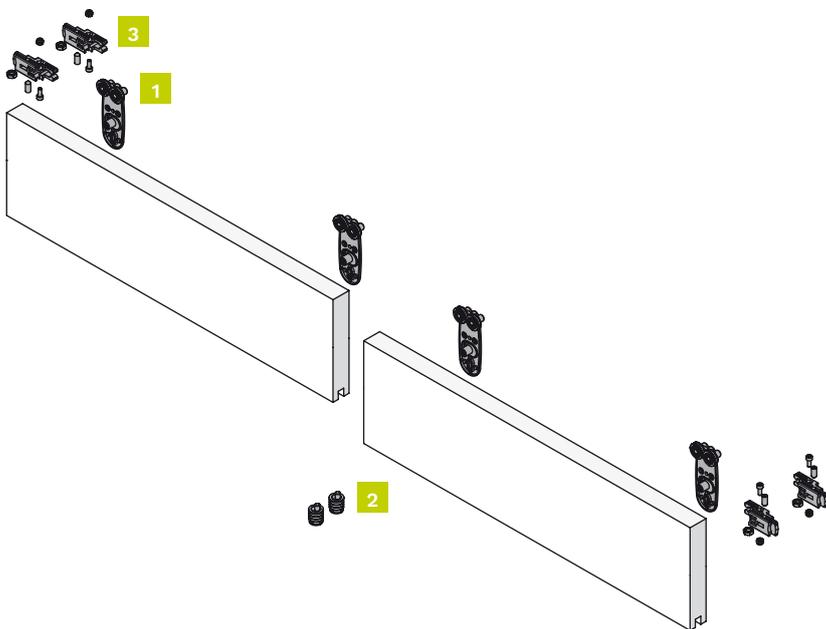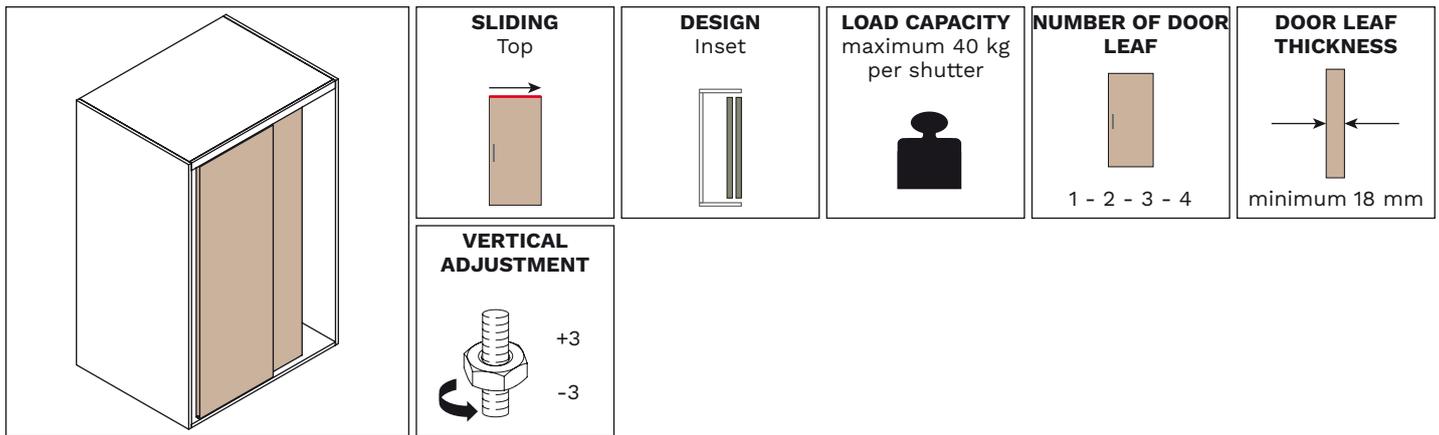

Kit components

Complete kit for an internal or external shutter
Item number: 1011 8

| Figure | Component | Quantity |
|--------|------------------------|----------|
| 1 | Upper roller - 40 kg | 2 pieces |
| 2 | Adjustable floor guide | 1 pieces |
| 3 | Adjustable end-stop | 2 pieces |

What should I order?

| Door leaf | Set |
|-----------|-----------------|
| n° 1 | 1 x art. 1011 8 |
| n° 2 | 2 x art. 1011 8 |
| n° 3 | 3 x art. 1011 8 |
| n° 4 | 4 x art. 1011 8 |

Complete the set in the section "Tracks, Accessories and Spare parts".


Number of shutters: purchase one kit for each shutter and choose between internal or external shutter.

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

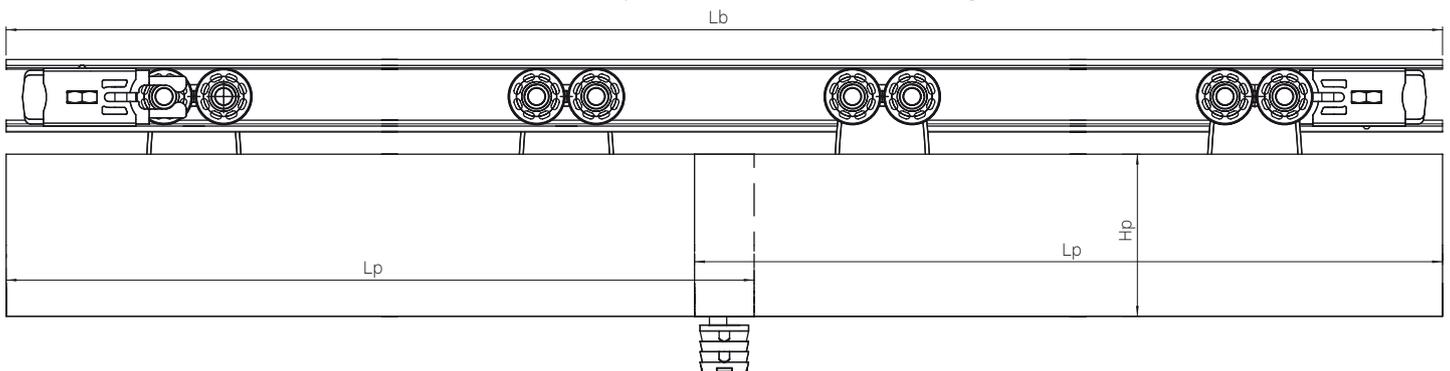

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter

Tracks, Accessories and Spare parts 1011 8


Complete the kit with track and accessory according to application.

Installation examples

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.


Double track

Thickness from 18 up to 20 mm

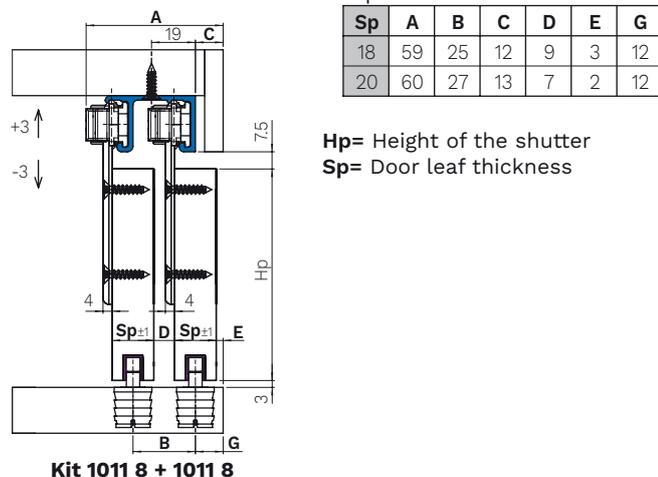


Single track

Thickness from 18 up to 32 mm

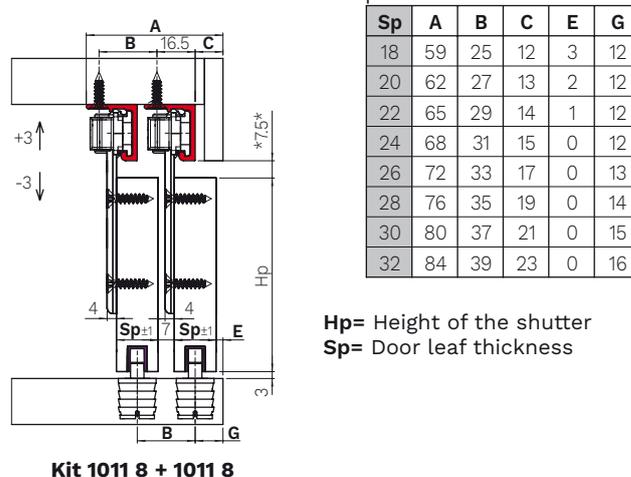

Dimensions tracks

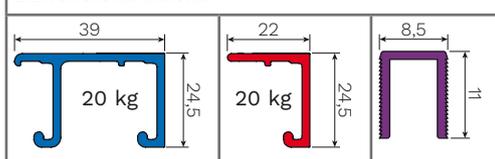

Tracks

| Double aluminum upper profile | Item number. |
|-------------------------------|---------------|
| 3 meters | 1010 2 |
| 6 meters | 1010 1 |
| Single aluminum upper profile | Item number. |
| 3 meters | 1010 4 |
| 6 meters | 1010 3 |
| Lower nylon guide track | Item number. |
| 2 meters | 1000 5 |

Accessories

| Component | Item number. |
|--------------------------------------|----------------|
| Door straightener for cabinet panels | 0910 9 |
| Stopper for third door | 1010 25 |

Spare parts



| Component | *Quantity | Item number. | Which set is it for? |
|------------------------|-----------|----------------|----------------------|
| Upper roller - 40 kg | 2 pieces | 1011 2 | 1011 8 |
| Adjustable floor guide | 1 piece | 1010 13 | 1011 8 |
| Adjustable end-stop | 2 pieces | 1010 14 | 1011 8 |

*The minimum order quantity is indicated.



KIT 1011 10

Sliding Furniture set with top sliding, inset shutter design and load capacity up to 40kg per shutter.

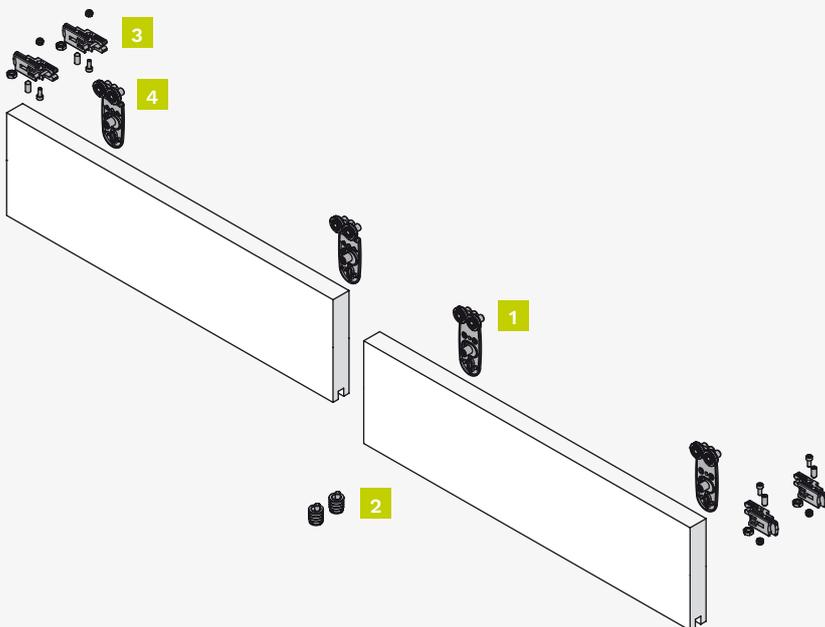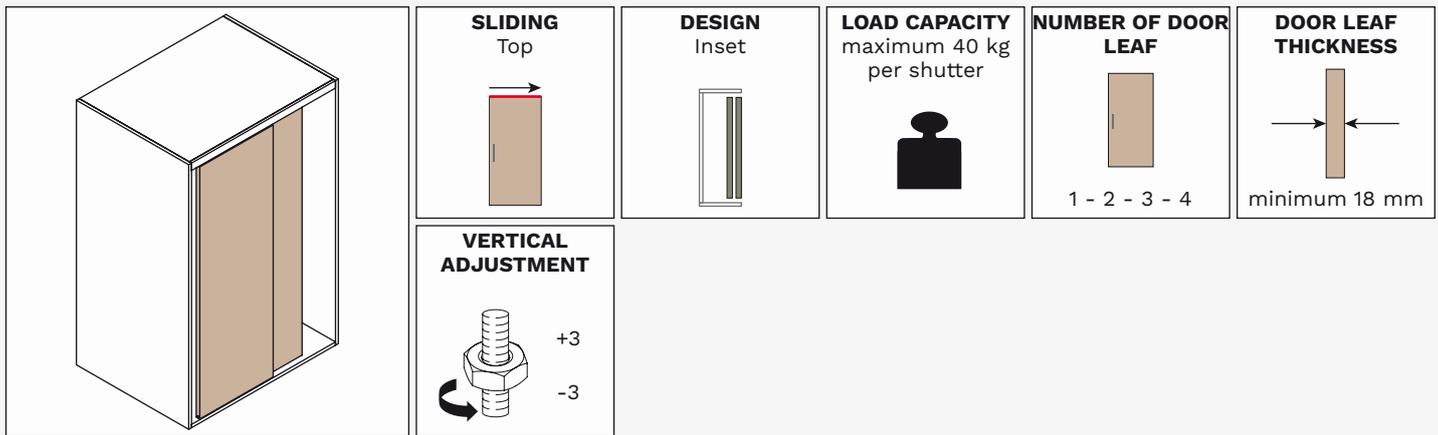

Kit components

Item number: 1011 10

(= 1 x art. 1011 8 + 1 x art. 1011 12)

Complete kit for an internal or external shutter

Item number: 1011 8

| Figure | Component | Quantity |
|--------|------------------------|----------|
| 1 | Upper roller - 40 kg | 2 pieces |
| 2 | Adjustable floor guide | 1 pieces |
| 3 | Adjustable end-stop | 2 pieces |

Complete kit for an internal shutter

Item number: 1011 12

| | | |
|---|-----------------------------|----------|
| 4 | Upper angled roller - 40 kg | 2 pieces |
| 2 | Adjustable floor guide | 1 pieces |
| 3 | Adjustable end-stop | 2 pieces |

What should I order?

Door leaf Set

| | |
|------|-------------------------------------|
| n° 2 | 1 x art. 1011 10 |
| n° 3 | 1 x art. 1011 10 + 1 x art. 1011 8 |
| n° 3 | 1 x art. 1011 10 + 1 x art. 1011 12 |
| n° 4 | 2 x art. 1011 10 |

Complete the set in the section "Tracks, Accessories and Spare parts".


Number of shutters: purchase one kit for each shutter and choose between internal or external shutter.

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

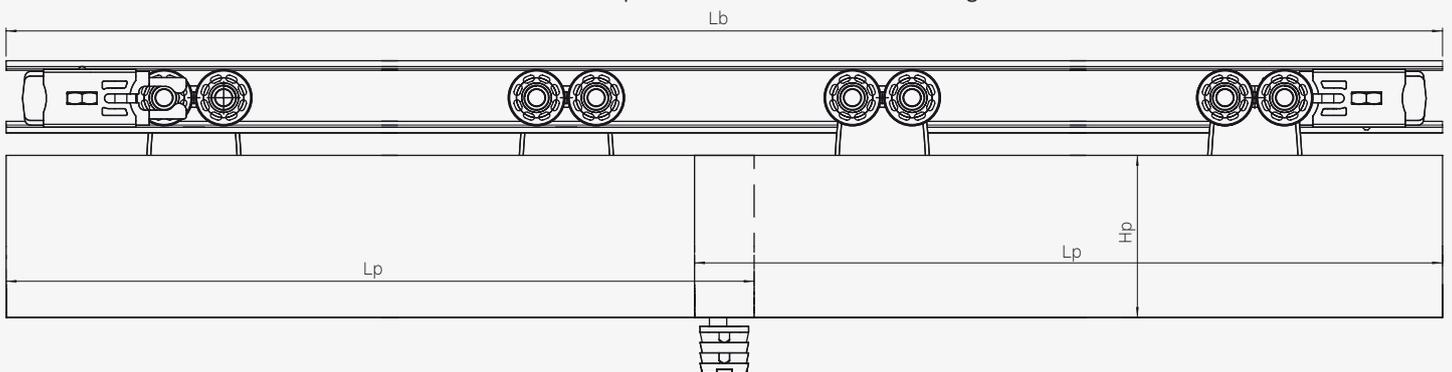

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter

Tracks, Accessories and Spare parts 1011 10


Complete the kit with track and accessory according to application.

Installation examples


Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

Double track

Thickness from 22 up to 24 mm

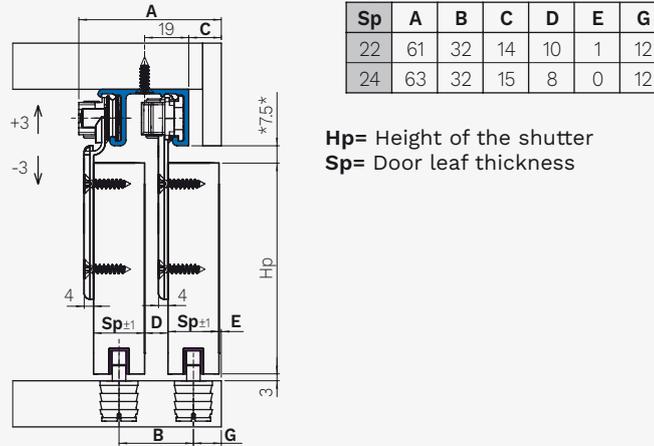

Dimensions tracks



Tracks

| Double aluminum upper profile | Item number. |
|-------------------------------|---------------|
| 3 meters | 1010 2 |
| 6 meters | 1010 1 |
| Lower nylon guide track | Item number. |
| 2 meters | 1000 5 |

Accessories



| Component | Item number. |
|--------------------------------------|----------------|
| Door straightener for cabinet panels | 0910 9 |
| Stopper for third door | 1010 25 |

Spare parts

| Component | *Quantity | Item number. | Which set is it for? |
|-----------------------------|-----------|----------------|----------------------------|
| Upper angled roller - 40 kg | 2 pieces | 1011 4 | 1011 12 / 1011 10 |
| Upper roller - 40 kg | 2 pieces | 1011 2 | 1011 8 / 1011 10 |
| Adjustable floor guide | 1 piece | 1010 13 | 1011 8 / 1011 10 / 1011 12 |
| Adjustable end-stop | 2 pieces | 1010 14 | 1011 8 / 1011 10 / 1011 12 |

*The minimum order quantity is indicated.


SYSTEM 0105

| | | | | | |
|--|--|---|--|--|--|
| <p>SLIDING Bottom</p>  | <p>DESIGN Inset</p>  | <p>LOAD CAPACITY maximum 60 kg per shutter</p>  | <p>NUMBER OF DOOR LEAF</p>  <p>1 - 2 - 3 - 4</p> | <p>DOOR LEAF THICKNESS</p>  <p>minimum 20 mm</p> | <p>VERTICAL ADJUSTMENT</p>  <p>+1 -1</p> |
|--|--|---|--|--|--|



INDEX

A sliding set for system 0105


| Set | Maximum load capacity per shutter | Door thickness | Sliding | Design | Soft-close | Page |
|--|-----------------------------------|----------------|---|--|------------|------|
| 0105 1 | 60 kg | minimum 20 mm | Bottom  | Inset  | No | 38 |
| Tracks, Accessories and Spare parts 0105 1 | | | | | | 39 |



KIT 0105 1

Sliding Furniture set with bottom sliding, inset shutter design and load capacity up to 60kg per shutter.

| | | | | | |
|--|--|----------------------------|--|---|---|
| | SLIDING Bottom | DESIGN Inset | LOAD CAPACITY maximum 60 kg per shutter | NUMBER OF DOOR LEAF 1 - 2 - 3 - 4 | DOOR LEAF THICKNESS minimum 20 mm |
| | VERTICAL ADJUSTMENT +1 -1 | | | | |

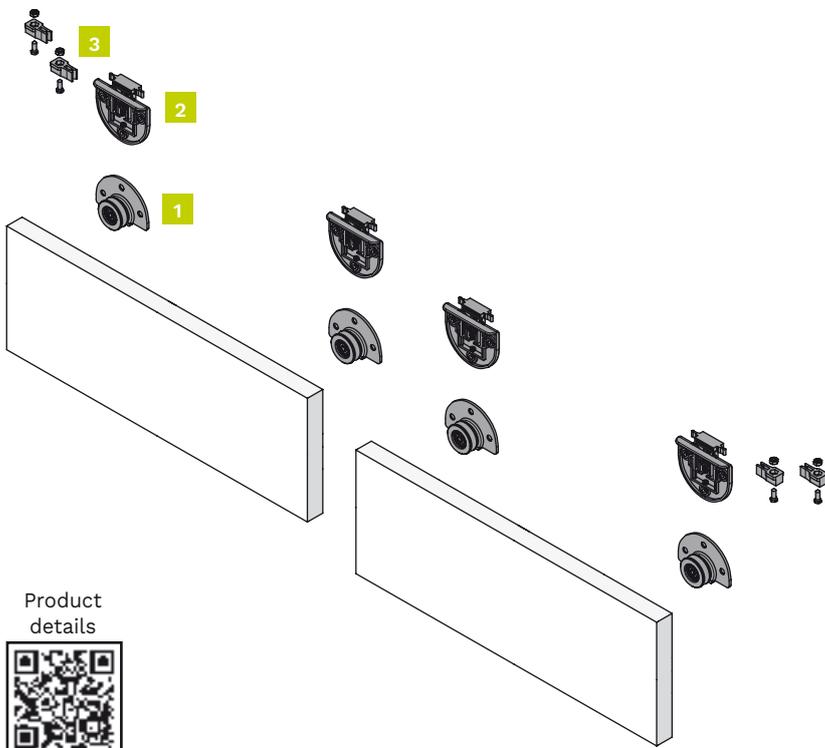

Kit components


1 door set
Item number: 0105 1

| Figure | Component | Quantity |
|--------|-------------------|----------|
| 1 | Lower runner | 2 pieces |
| 2 | Upper drag runner | 2 pieces |
| 3 | End-stop | 2 pieces |

Complete the set in the section "Tracks, Accessories and Spare parts".

Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

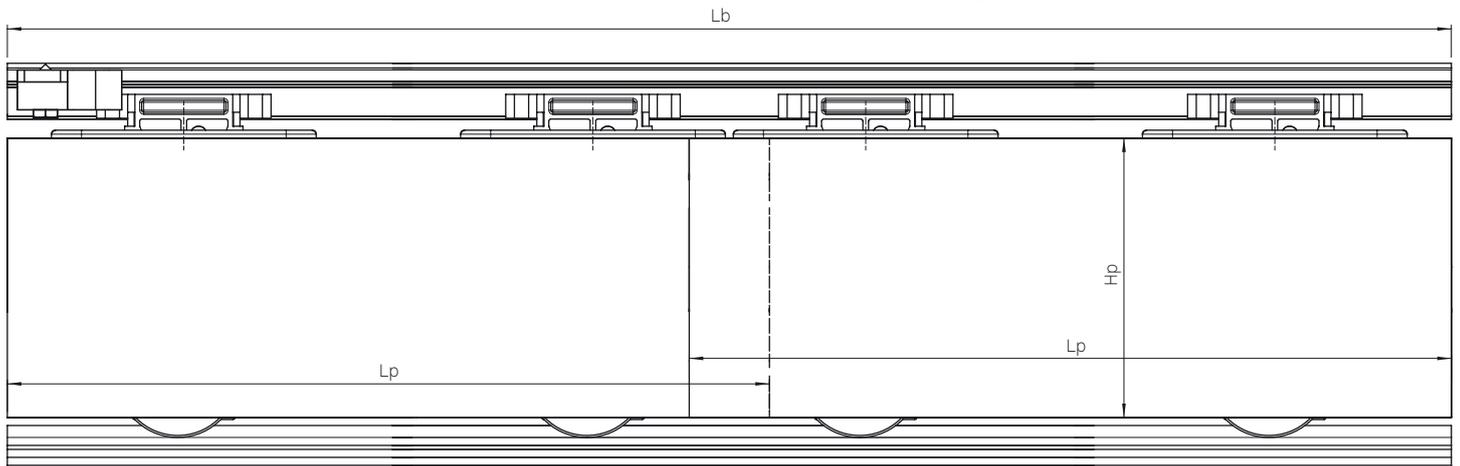

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter




Tracks, Accessories and Spare parts 0105 1

Complete the kit with track and accessory according to application.


Installation examples

Dimensions indicated in millimeters and are related to up to 60 kg track. You can find the complete dimensions in the mounting instructions.

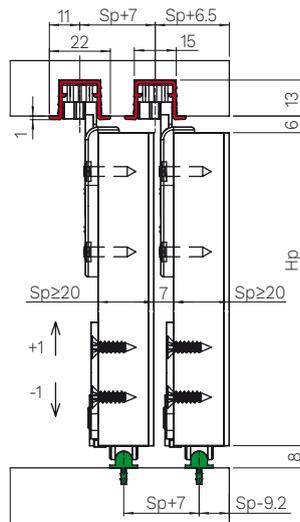

Hp= Height of the shutter - **Sp**= Door leaf thickness

Tracks



Tracks




| Silver colour anodized upper track - 60 kg | Item number. |
|--|----------------|
| 2 meters | 0100 4A |
| 3 meters | 0100 5A |
| 4 meters | 0100 6A |
| Bronze colour anodized upper track - 60 kg | Item number. |
| 2 meters | 0100 4B |
| 3 meters | 0100 5B |
| 4 meters | 0100 6B |
| Silver colour anodized lower track - 60 kg | Item number. |
| 2 meters | 0100 1A |
| 3 meters | 0100 2A |
| 4 meters | 0100 3A |
| Bronze colour anodized lower track - 60 kg | Item number. |
| 2 meters | 0100 1B |
| 3 meters | 0100 2B |
| 4 meters | 0100 3B |

Spare parts

| Component | *Quantity | Item number. | Which set is it for? |
|-------------------|-----------|----------------|----------------------|
| Upper drag runner | 2 pieces | 0100 13 | 0105 1 |
| Lower runner | 2 pieces | 0105 2 | 0105 1 |
| End-stop | 2 pieces | 0100 10 | 0105 1 |

*The minimum order quantity is indicated.



SYSTEM 0310

| | | | | | | |
|--|--|---|--|---|--|--|
| <p>SLIDING Bottom</p>  | <p>DESIGN Inset</p>  | <p>LOAD CAPACITY maximum 43 kg per shutter</p>  | <p>NUMBER OF DOOR LEAF</p>  <p>1 - 2 - 3 - 4</p> | <p>DOOR LEAF THICKNESS</p>  <p>minimum 16 mm</p> | <p>VERTICAL ADJUSTMENT</p>  <p>+1 -1</p> | <p>FIXING SCREWS Fixing screws Included</p>  |
|--|--|---|--|---|--|--|



INDEX


A sliding set for system 0310

| Set | Maximum load capacity per shutter | Door thickness | Sliding | Design | Soft-close | Page |
|---|-----------------------------------|----------------|---|--|------------|------|
| 0310 7 | 23 kg | minimum 16 mm | Bottom  | Inset  | No | 42 |
| 0310 9 | 43 kg | minimum 16 mm | Bottom  | Inset  | No | 43 |
| Tracks, Accessories and Spare parts 0310 7 / 0310 9 | | | | | | 44 |

KIT 0310 7

Sliding Furniture set with bottom sliding, inset shutter design and load capacity up to 23kg per shutter.

| | | | | | |
|--|--|--|---|---|---|
| | SLIDING Bottom | DESIGN Inset | LOAD CAPACITY maximum 23 kg per shutter | NUMBER OF DOOR LEAF 1 - 2 - 3 - 4 | DOOR LEAF THICKNESS minimum 16 mm |
| | VERTICAL ADJUSTMENT +1 -1 | FIXING SCREWS Fixing screws Included | | | |

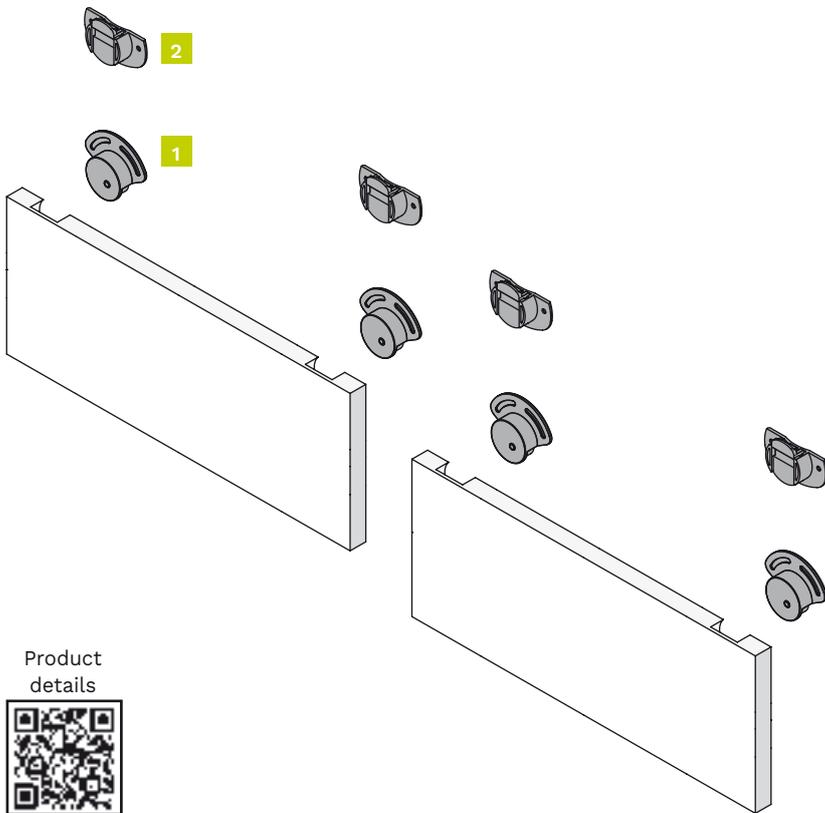

Kit components

1 door set

Item number: 0310 7

| Figure | Component | Quantity |
|--------|----------------------|----------|
| 1 | Lower runner - 23 kg | 2 pieces |
| 2 | Upper drag runner | 2 pieces |


Complete the set in the section "Tracks, Accessories and Spare parts".

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

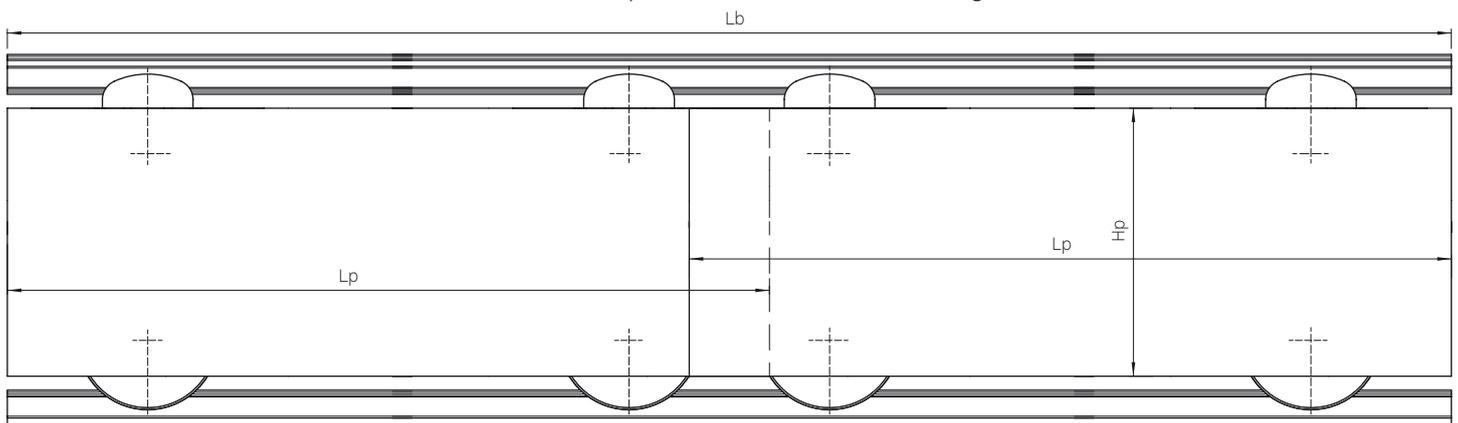


Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter



KIT 0310 9

Sliding Furniture set with bottom sliding, inset shutter design and load capacity up to 43kg per shutter.

| | | | | | |
|--|--|---|--|---|---|
| | SLIDING Bottom | DESIGN Inset | LOAD CAPACITY maximum 43 kg per shutter | NUMBER OF DOOR LEAF 1 - 2 - 3 - 4 | DOOR LEAF THICKNESS minimum 16 mm |
| | VERTICAL ADJUSTMENT +1 -1 | FIXING SCREWS Fixing screws Included | | | |

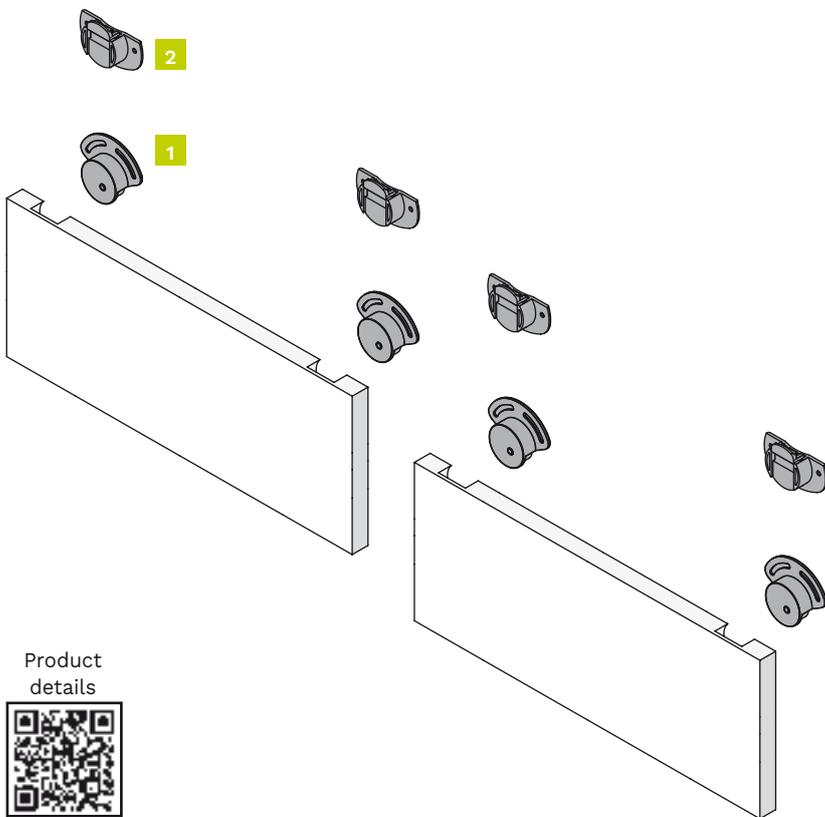

Kit components

1 door set

Item number: 0310 9

| Figure | Component | Quantity |
|--------|--|----------|
| 1 | Lower runner with Delrin wheel - 43 kg | 2 pieces |
| 2 | Upper drag runner | 2 pieces |


Complete the set in the section "Tracks, Accessories and Spare parts".

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

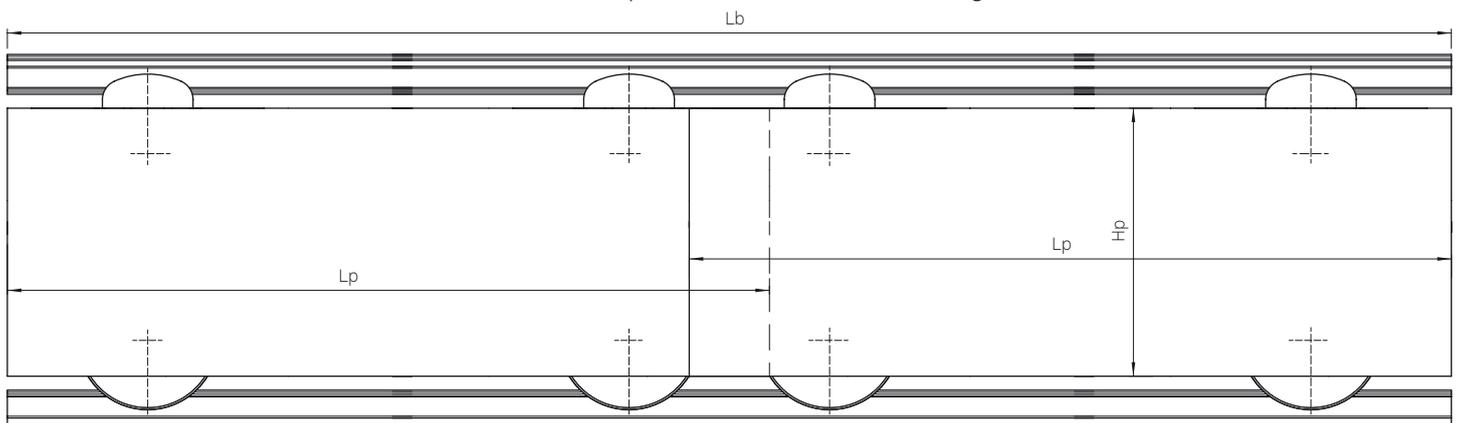

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter




Tracks, Accessories and Spare parts 0310 7 / 0310 9

Complete the kit with track and accessory according to application.

Installation examples

Dimensions indicated in millimetres and relating to the lower and/or upper guide. You can find the complete dimensions in the mounting instructions.

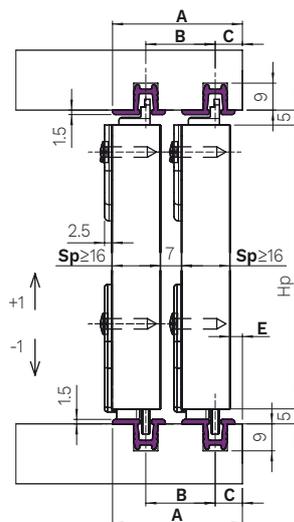

| Sp | A | B | C | E |
|----|----|----|----|---|
| 16 | 43 | 23 | 9 | 4 |
| 18 | 45 | 25 | 9 | 2 |
| 20 | 47 | 27 | 9 | 0 |
| 22 | 51 | 29 | 11 | 0 |
| 24 | 55 | 31 | 13 | 0 |
| 26 | 59 | 33 | 15 | 0 |
| 28 | 63 | 35 | 17 | 0 |
| 30 | 67 | 37 | 19 | 0 |
| 32 | 71 | 39 | 21 | 0 |

Hp= Height of the shutter
Sp= Door leaf thickness

Upper and lower guide



Upper and lower guide

| Upper and lower nylon guide track | Item number. |
|---|-----------------|
| 2 meters white | 0310 10B |
| 2 meters black | 0310 12N |
| 3 meters white | 0310 13B |
| 3 meters brown | 0310 14M |
| 3 meters black | 0310 15N |
| Upper and lower aluminium guide track - Raw | Item number. |
| 2 meters | 0310 1 |
| 3 meters | 0310 2 |
| Upper and lower aluminium guide track - Silver anodized | Item number. |
| 2 meters | 0310 3 |
| 3 meters | 0310 4 |

Accessories

| Component | Item number. |
|--------------------------------------|-----------------|
| Magnetic stopper | 0300 1.6 |
| Door straightener for cabinet panels | 0910 9 |




Spare parts

| Component | *Quantity | Item number. | Which set is it for? |
|--|-----------|---------------|----------------------|
| Lower runner - 23 kg | 2 pieces | 0310 5 | 0310 7 |
| Lower runner with Delrin wheel - 43 kg | 2 pieces | 0310 8 | 0310 9 |
| Upper drag runner | 2 pieces | 0310 6 | 0310 7 / 0310 9 |

*The minimum order quantity is indicated.





SYSTEM 0320

| | | | | | | |
|--|--|---|--|---|--|--|
| <p>SLIDING Bottom</p>  | <p>DESIGN Inset</p>  | <p>LOAD CAPACITY maximum 40 kg per shutter</p>  | <p>NUMBER OF DOOR LEAF</p>  <p>1 - 2 - 3 - 4</p> | <p>DOOR LEAF THICKNESS</p>  <p>minimum 16 mm</p> | <p>VERTICAL ADJUSTMENT</p>  <p>+2.5 -2.5</p> | <p>FIXING SCREWS Fixing screws Included</p>  |
|--|--|---|--|---|--|--|



INDEX

A sliding set for system 0320


| Set | Maximum load capacity per shutter | Door thickness | Sliding | Design | Soft-close | Page |
|--|-----------------------------------|----------------|---|--|------------|------|
| 0320 8 | 25 kg | minimum 16 mm | Bottom  | Inset  | No | 48 |
| 0320 10 | 40 kg | minimum 16 mm | Bottom  | Inset  | No | 49 |
| Tracks, Accessories and Spare parts 0320 8 / 0320 10 | | | | | | 50 |



KIT 0320 8

Sliding Furniture set with bottom sliding, inset shutter design and load capacity up to 25kg per shutter.

| | | | | | |
|--|--|--|---|---|---|
| | SLIDING Bottom | DESIGN Inset | LOAD CAPACITY maximum 25 kg per shutter | NUMBER OF DOOR LEAF 1 - 2 - 3 - 4 | DOOR LEAF THICKNESS minimum 16 mm |
| | VERTICAL ADJUSTMENT +2.5 -2.5 | FIXING SCREWS Fixing screws Included | | | |

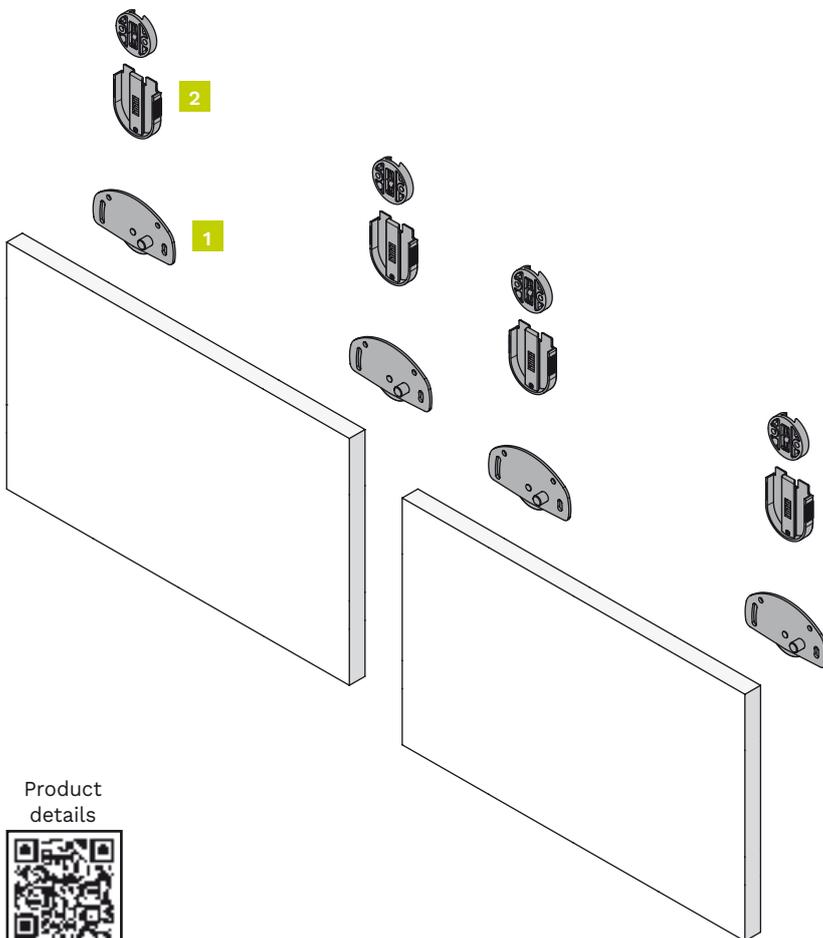

Kit components

1 door set

Item number: 0320 8

| Figure | Component | Quantity |
|--------|------------------------------------|----------|
| 1 | Lower runner - 25 kg | 2 pieces |
| 2 | Upper drag runner | 2 pieces |
| 3 | Stop brake | 1 piece |
| 4 | Fixing screws for slide and roller | 1 piece |


Complete the set in the section "Tracks, Accessories and Spare parts".

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

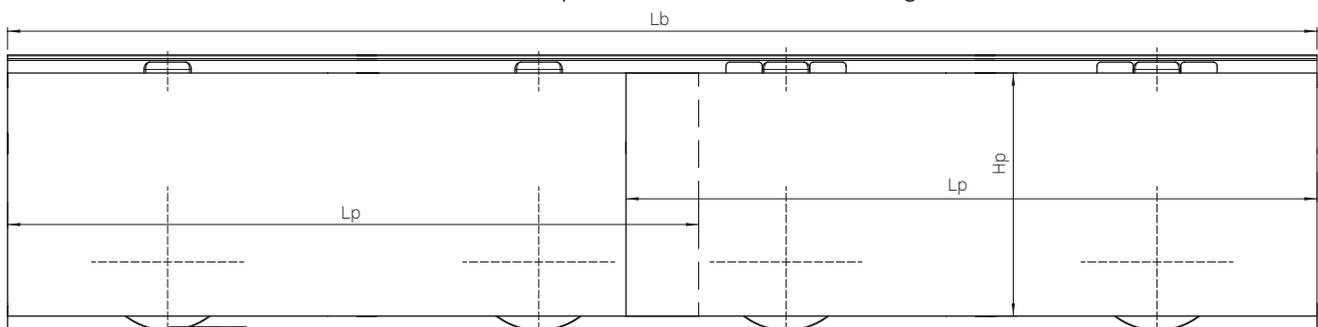


Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter



KIT 0320 10

Sliding Furniture set with bottom sliding, inset shutter design and load capacity up to 40kg per shutter.

| | | | | | |
|--|--------------------------------|--|---|---|---|
| | SLIDING Bottom | DESIGN Inset | LOAD CAPACITY maximum 40 kg per shutter | NUMBER OF DOOR LEAF 1 - 2 - 3 - 4 | DOOR LEAF THICKNESS minimum 16 mm |
| | VERTICAL ADJUSTMENT | FIXING SCREWS Fixing screws Included | | | |

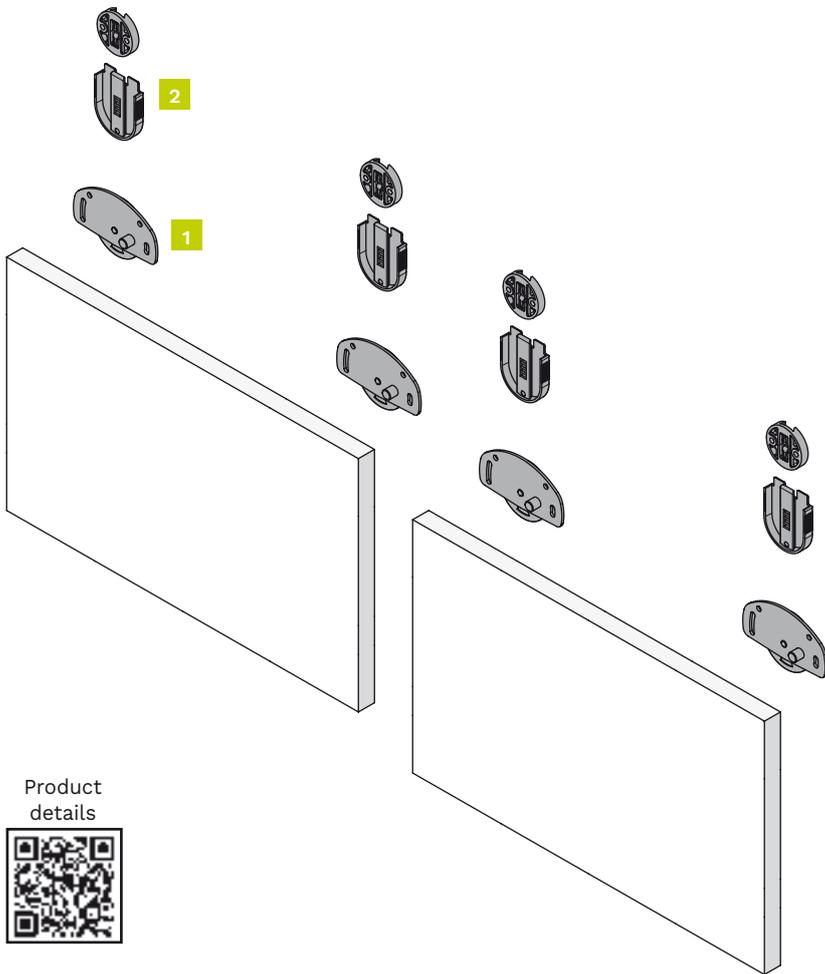

Kit components

1 door set

Item number: 0320 10

| Figure | Component | Quantity |
|--------|--|----------|
| 1 | Lower runner with Delrin wheel - 40 kg | 2 pieces |
| 2 | Upper drag runner | 2 pieces |
| 3 | Stop brake | 1 piece |
| 4 | Fixing screws for slide and roller | 1 piece |


Complete the set in the section "Tracks, Accessories and Spare parts".

Product details



Technical drawings

Dimensions indicated in millimeters. You can find the complete dimensions in the mounting instructions.

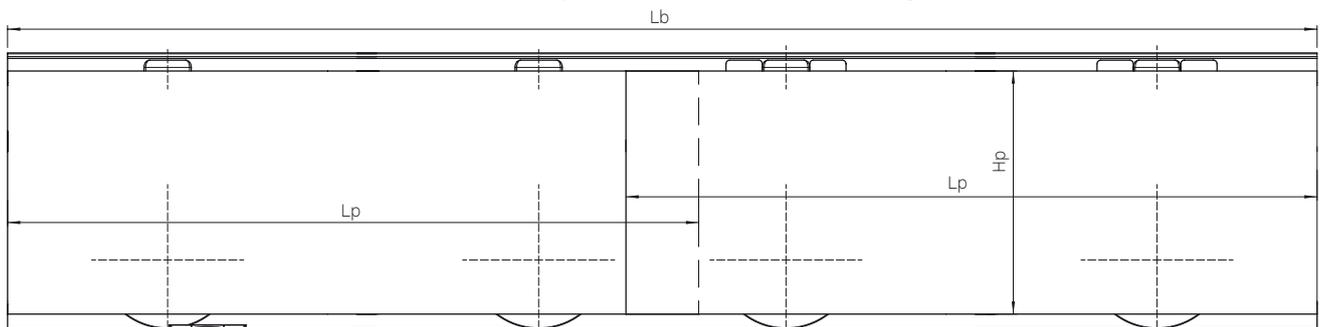

Lp= Width of the shutter - Lb= Track length - Hp= Height of the shutter




Tracks, Accessories and Spare parts 0320 8 / 0320 10

Complete the kit with track and accessory according to application.

Installation examples


Dimensions indicated in millimetres and relating to the lower and/or upper guide. You can find the complete dimensions in the mounting instructions.

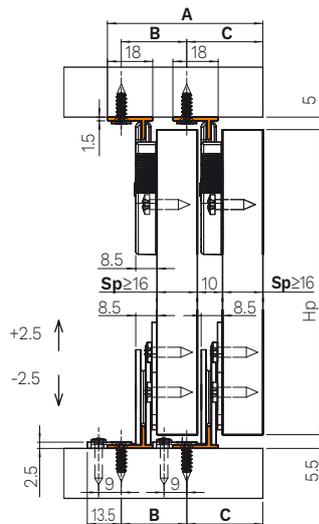

| Sp | A | B | C |
|----|------|----|----|
| 16 | 61.5 | 26 | 30 |
| 18 | 65.5 | 28 | 32 |
| 20 | 69.5 | 30 | 34 |
| 22 | 73.5 | 32 | 36 |
| 24 | 77.5 | 34 | 38 |
| 26 | 81.5 | 36 | 40 |
| 28 | 85.5 | 38 | 42 |
| 30 | 89.5 | 40 | 44 |
| 32 | 93.5 | 42 | 46 |

Hp= Height of the shutter
Sp= Door leaf thickness

Dimensions tracks



Upper and lower guide

| Upper and lower drilled aluminium track - Raw | Item number. |
|---|-----------------|
| 2 meters | 0320 1B |
| 3 meters | 0320 2B |
| Upper and lower drilled aluminium track - Silver anodized | Item number. |
| 2 meters | 0320 17N |
| 3 meters | 0320 18N |

Accessories

| Component | Item number. |
|--------------------------------------|-----------------|
| Magnetic stopper | 0300 1.6 |
| Door straightener for cabinet panels | 0910 9 |

Spare parts

| Component | *Quantity | Item number. | Which set is it for? |
|--|-----------|---------------|----------------------|
| Lower runner - 25 kg | 2 pieces | 0320 6 | 0320 8 |
| Lower runner with Delrin wheel - 40 kg | 2 pieces | 0320 9 | 0320 10 |
| Upper drag runner | 2 pieces | 0320 5 | 0320 8 / 0320 10 |
| Stop brake | 1 piece | 0320 7 | 0320 8 / 0320 10 |



*The minimum order quantity is indicated.



PIVOT SLIDING DOOR SYSTEMS

for furnitures and wardrobes




| System | Maximum load capacity | Width of the shutter | Height of the shutter | Door thickness | Plus | Application | Page |
|--|-----------------------|----------------------------------|--|--------------------------------|--|--|------|
| New Darwin 2.0 | 50 kg | minimum 200 mm maximum 700 mm | from 1200 to 1400 mm from 1990 to 2200 mm from 2200 a 2700 mm | minimum 18 mm maximum 30 mm | Dampened closing | Pivot sliding door pocket fitting  | 56 |
| How to choose the New Darwin 2.0 | | | | | | | 57 |
| Accessories to complete the system and spare parts | | | | | | | 58 |
| New Darwin Double door leaf | 60 kg | minimum 200 mm maximum 700 mm | from 1200 to 1400 mm from 1990 to 2200 mm from 2200 to 2700 mm | minimum 18 mm maximum 30 mm | Automatic opening of technical compartment | Pivot sliding door pocket fitting  | 60 |
| How to choose the New Darwin double leaf version | | | | | | | 61 |
| Accessories to complete the system and spare parts | | | | | | | 62 |





TERMS AND DEFINITIONS


• APPLICATION

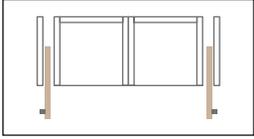

Pivot sliding door pocket fitting

In the open position the shutters can be hidden in a niche on the side of the cabinet.

• DAMPENED DOOR CLOSING

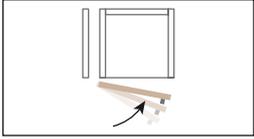

The system is equipped with special hinges for a dampened shutter closing.


• PRE-ASSEMBLED



Quick and easy installation


The system is supplied pre-assembled and therefore ready to be fixed on the side of the cabinet.

• AUTO-RETRIEVAL SHUTTER DEVICE

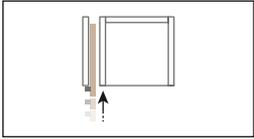


The doors are automatically retrieved inside the niche.


• 3D ADJUSTMENTS

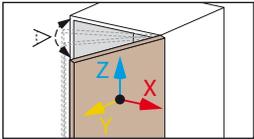

• DESIGN

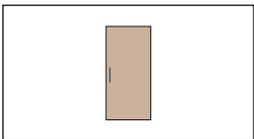

Pivot sliding door pocket fitting Single door leaf version







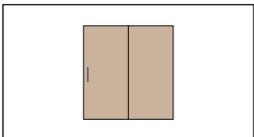


Pivot sliding door pocket fitting Double door leaf version

NEW DARWIN 2.0

PATENTED

Pre-assembled furniture kit for single pivot sliding door fitting with load capacity 50kg per shutter.

| | | | | | | |
|--|---|---|---|---|--|---|
| <p>APPLICATION Pivot sliding door pocket fitting</p>  | <p>DESIGN Pivot sliding door pocket fitting</p>  <p>Single door leaf 1 kit for 1 shutter</p> | <p>DAMPENED DOOR CLOSING</p>  | <p>PRE-ASSEMBLED Quick and easy installation</p>  | <p>LOAD CAPACITY maximum 30 kg per shutter</p>  | <p>DOOR LEAF THICKNESS</p>  <p>minimum 18 mm maximum 30 mm</p> | <p>WIDTH OF THE SHUTTER</p>  <p>minimum 200 mm maximum 700 mm</p> |
| <p>HEIGHT OF THE SHUTTER</p>  <p>1200 mm - 1400 mm 1990 mm - 2200 mm 2200 mm - 2700 mm</p> | <p>DEPTH</p>  <p>minimum 560 mm minimum 665 mm minimum 700 mm minimum 765 mm</p> | <p>3D ADJUSTMENTS</p>  | <p>OPTIONAL Auto-retrieval shutter Device</p>  | <p>OPTIONAL Load capacity increase kit (from 30 kg to 50 kg)</p>  | | |

Closed shutters



Open shutters



Shutters internal to the cabinet



How to choose the New Darwin 2.0



System

The New Darwin 2.0 is a pre-assembled system available in 10 versions. Each version is changing according to the depth of the cabinet in relation to specific door heights.

| Depth | Height of the shutter | Load capacity | Item number. |
|----------------|-------------------------|----------------|-----------------------|
| minimum 560 mm | from 1990 mm to 2200 mm | 30 kg (50 kg)* | 9500 1 560 ABS |
| minimum 560 mm | from 2200 mm to 2700 mm | 50 kg | 9500 2 560 ABS |
| minimum 560 mm | from 1200 mm to 1400 mm | 30 kg | 9500 3 560 ABS |
| minimum 665 mm | from 1990 mm to 2200 mm | 30 kg (50 kg)* | 9500 1 665 ABS |
| minimum 665 mm | from 2200 mm to 2700 mm | 50 kg | 9500 2 665 ABS |
| minimum 665 mm | from 1200 mm to 1400 mm | 30 kg | 9500 3 665 ABS |
| minimum 700 mm | from 1990 mm to 2200 mm | 30 kg (50 kg)* | 9500 1 700 ABS |
| minimum 700 mm | from 2200 mm to 2700 mm | 50 kg | 9500 2 700 ABS |
| minimum 700 mm | from 1200 mm to 1400 mm | 30 kg | 9500 3 700 ABS |
| minimum 765 mm | from 1990 mm to 2200 mm | 30 kg (50 kg)* | 9500 1 765 ABS |

*The system can reach a load capacity of 50 kg by adding the 9500 11 ABS accessory.




Product details



Technical drawings

Dimensions indicated in millimeters

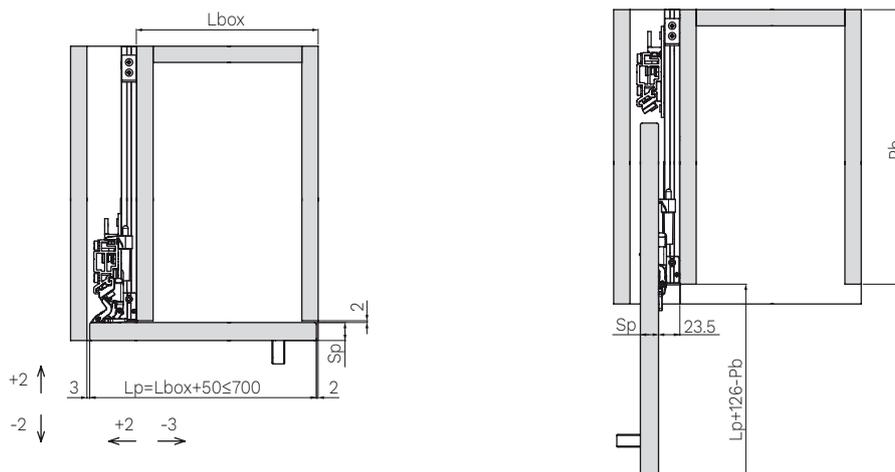



Lp= Width of the shutter - **Lbox**= Cabinet body width - **Pb**= Depth

Accessories to complete the system and spare parts

| Figure | Component | *Quantity | Item number. |
|--------|--|-----------|--------------------|
| 1 | Spacer to connect the side compartment (upper or lower) | 1 piece | 9500 6** |
| 2 | Spacer for joining convergent doors (upper and lower) | 1 piece | 9500 6 2S |
| 3 | Load capacity increase kit (from 30 kg to 50 kg) - box with 2 hinges | 2 pieces | 9500 11 ABS |
| 4 | Panel Auto-retrieval device (depth 560 mm, 665 mm and 700 mm) | 1 piece | 9500 16 RV |
| 5 | Soft wheel pulley guide | 4 pieces | 9500 17 1 |

*The minimum order quantity is indicated.


**Simply order one kit consisting of a 1550 mm long carter and fixing accessories. The Carter has be cut into two parts by the customer during the installation phase, adapting it to the size of the box. The two sections obtained will be used for the upper and lower parts respectively. The assembly instructions included in the kit provide details on how to proceed correctly.

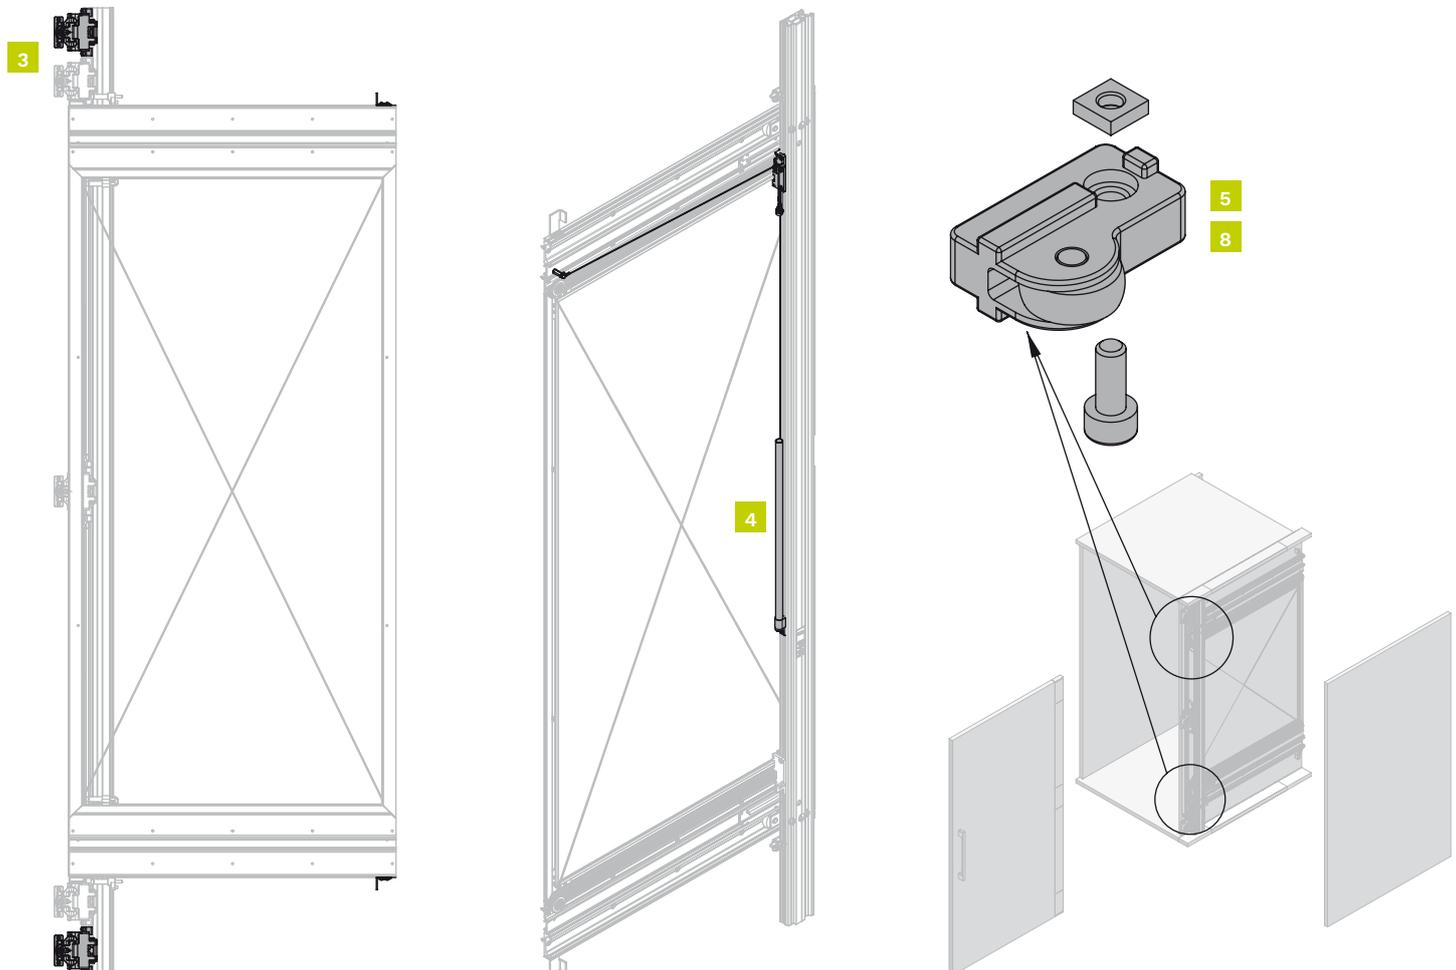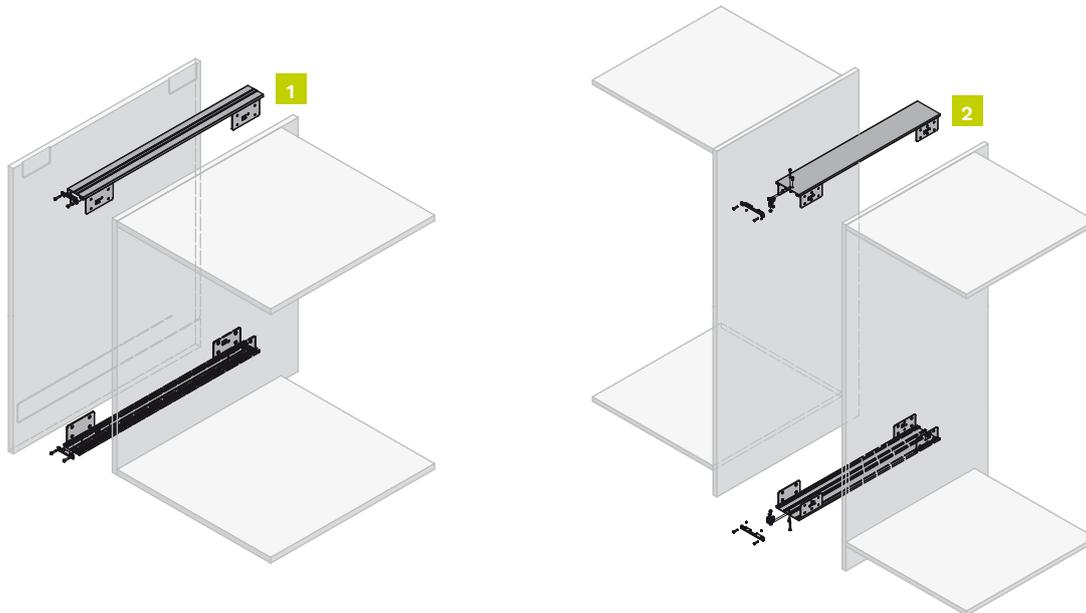

Spare parts








| Figure | Component | *Quantity | Item number. | Which set is it for? |
|--------|--|-----------|-------------------|----------------------|
| 6 | Hinge single door leaf | 1 piece | 9500 9 ABS | NEW DARWIN 2.0 |
| 7 | Track covering sheet (height 1990-2200 mm) | 2 pieces | 9500 7 | NEW DARWIN 2.0 |
| | Track covering sheet (height 2200-2700 mm) | 2 pieces | 9500 8 | NEW DARWIN 2.0 |
| | Track covering sheet (height 1200-1400 mm) | 2 pieces | 9500 19 | NEW DARWIN 2.0 |
| - | Z-axis adjustment unit ABS 9500 | 1 piece | 9500 13.1 | NEW DARWIN 2.0 |
| 8 | Hard wheel pulley guide | 4 pieces | 9500 17 | NEW DARWIN 2.0 |
| 9 | Metal tag for connecting carter support | 1 piece | 9500 20 | NEW DARWIN 2.0 |
| 10 | Upper and lower kit units for door leaf | 2 pieces | 9500 21 | NEW DARWIN 2.0 |
| 11 | Set of backside upper and lower stops | 2 pieces | 9500 22 | NEW DARWIN 2.0 |

*The minimum order quantity is indicated.

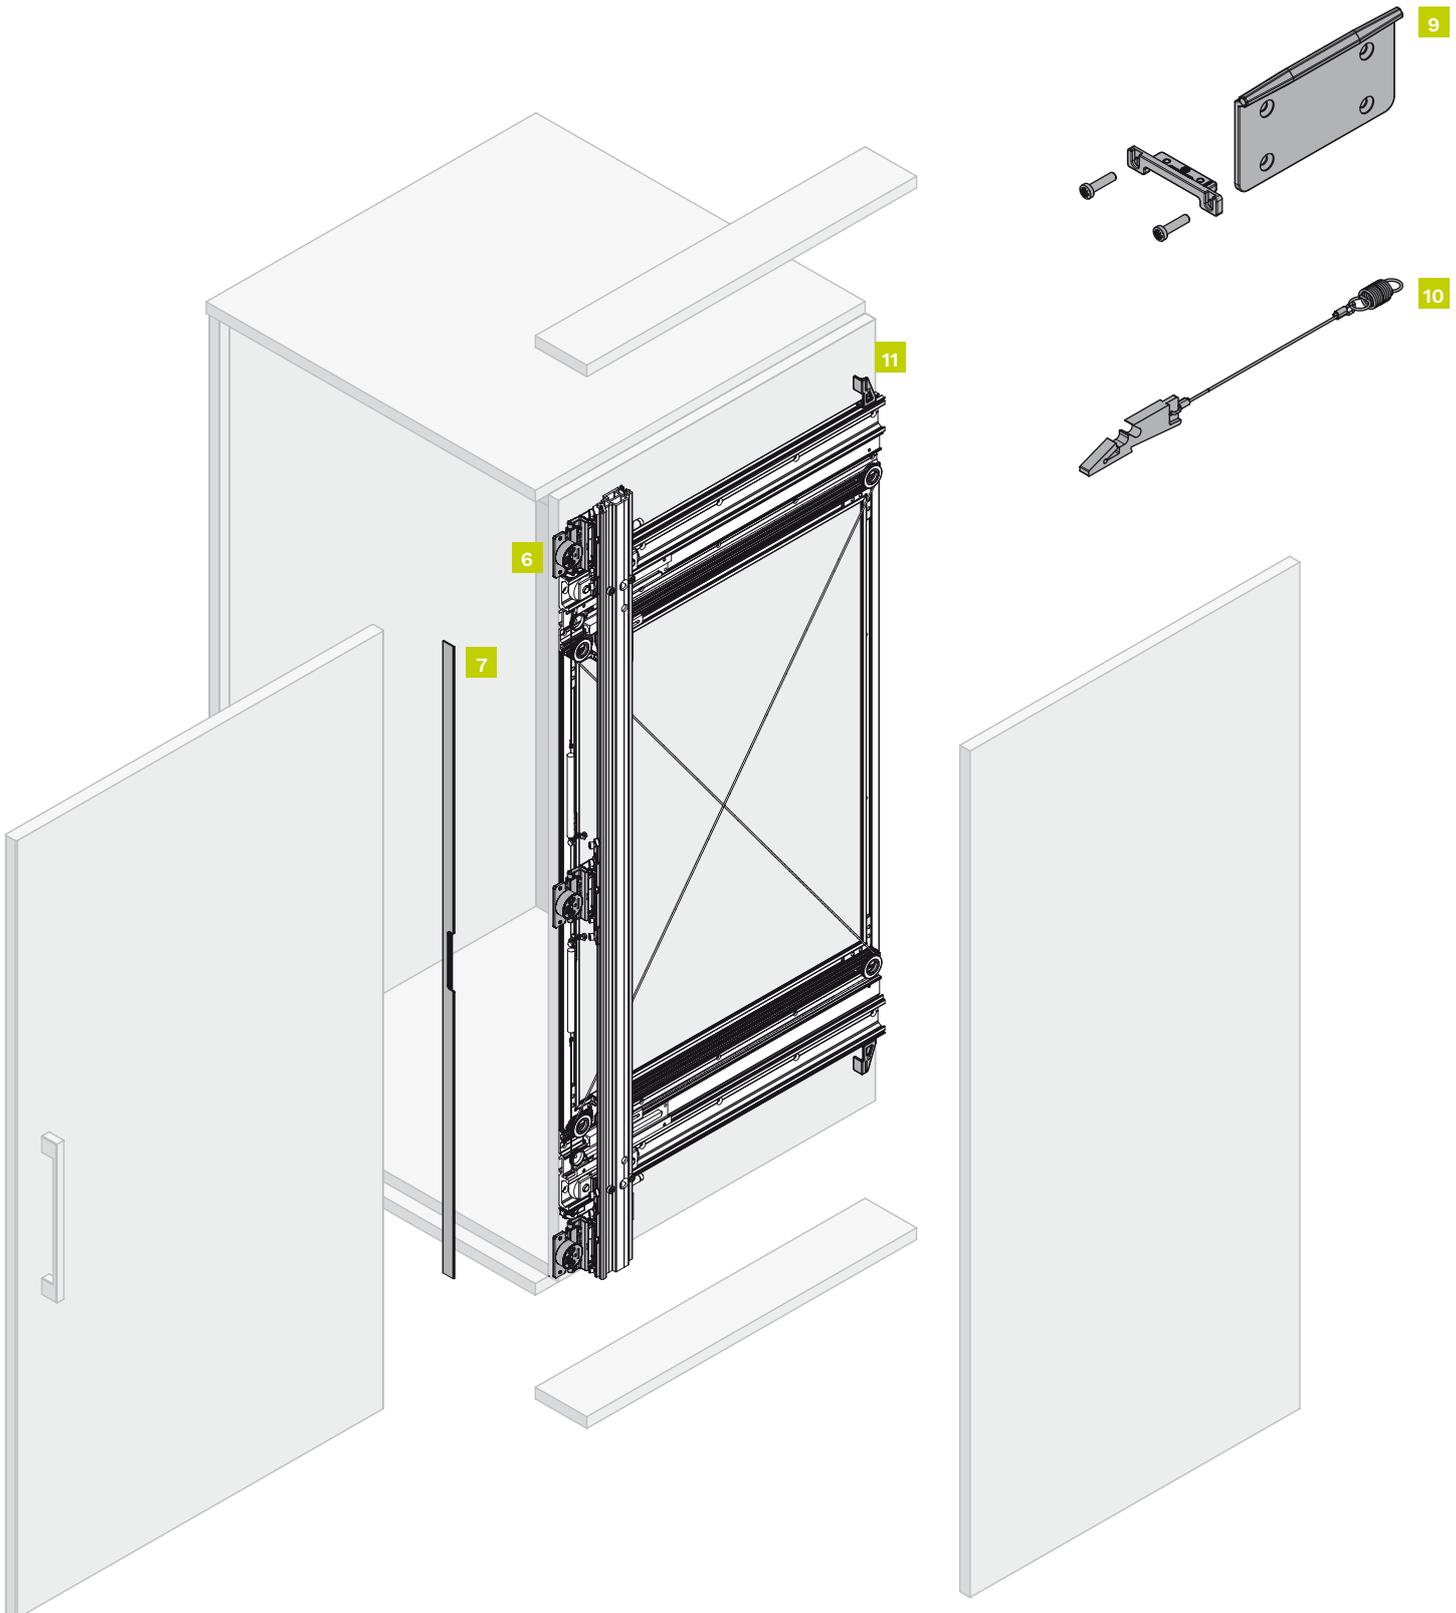

NEW DARWIN DOUBLE DOOR LEAF

Pre-assembled furniture kit for double pivot sliding door fitting with load capacity 30kg per shutter.
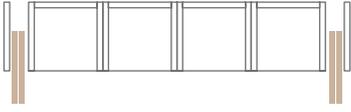
| | | | | | |
|--|--|---|---|--|---|
| <p>APPLICATION Pivot sliding door pocket fitting</p>  | <p>DESIGN Pivot sliding door pocket fitting</p>  <p>Double door leaf 1 kit for 2 shutters</p> | <p>PRE-ASSEMBLED Quick and easy installation</p>  | <p>LOAD CAPACITY maximum 60 kg for 2 shutters</p>  | <p>DOOR LEAF THICKNESS</p>  <p>minimum 18 mm maximum 30 mm</p> | <p>WIDTH OF THE SHUTTER</p>  <p>minimum 200 mm maximum 700 mm</p> |
| <p>HEIGHT OF THE SHUTTER</p>  <p>1200 mm - 1400 mm 1990 mm - 2200 mm 2200 mm - 2700 mm</p> | <p>DEPTH</p>  <p>minimum 665 mm minimum 805 mm minimum 905 mm</p> | <p>3D ADJUSTMENTS</p>  | <p>AUTOMATIC OPENING OF TECHNICAL COMPARTMENT</p>  | | |



How to choose the New Darwin double leaf version

System

The New Darwin Double Door is a pre-assembled system available in 6 versions. Each version is changing according to the depth of the cabinet, the height and width of the door.

| Depth | Height of the shutter | Width of the shutter | Load capacity | Item number. |
|----------------|-----------------------|----------------------|----------------------------|---------------------|
| minimum 665 mm | 1990 mm - 2200 mm | 200 mm - 460 mm | 60 kg (2 x 30 kg shutters) | 9500 1 665 1 |
| minimum 805 mm | 1990 mm - 2200 mm | 200 mm - 600 mm | 60 kg (2 x 30 kg shutters) | 9500 1 805 |
| minimum 805 mm | 2200 mm - 2700 mm | 200 mm - 600 mm | 60 kg (2 x 30 kg shutters) | 9500 2 805 |
| minimum 805 mm | 1200 mm - 1400 mm | 200 mm - 600 mm | 30 kg (2 x 15 kg shutters) | 9500 3 805 |
| minimum 905 mm | 1990 mm - 2200 mm | 200 mm - 700 mm | 60 kg (2 x 30 kg shutters) | 9500 1 905 |
| minimum 905 mm | 2200 mm - 2700 mm | 200 mm - 700 mm | 60 kg (2 x 30 kg shutters) | 9500 2 905 |




Product details



Technical drawings

Dimensions indicated in millimeters

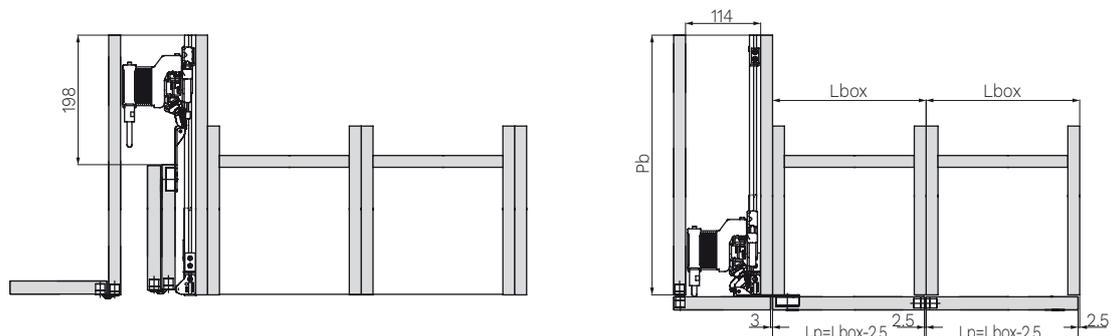

Lp= Width of the shutter - **Lbox**= Cabinet body width (for 2 door leaves) - **Pb**= Depth





www.kronakoblenz.com



Accessories to complete the system and spare parts

| Figure | Component | *Quantity | Item number. |
|--------|---|-----------|--------------|
| 1 | Upper-Lower carter double door leaf | 1 piece | 9500 6 D |
| 2 | Adjustable door hook | 1 piece | 9500 5 R |
| 3 | Accessory to attach the door leaf | 1 piece | 9500 5 |
| 4 | Door straightener for cabinet panels | 25 pieces | 0910 9 |
| 5 | Magnet for casing | 1 piece | 9500 4 |
| 6 | Covering blank sheet - Height 1200 mm / 1400 mm | 1 piece | 9500 3 3 R |
| | Covering blank sheet - Height 2200 mm / 2700 mm | 1 piece | 9500 2 3 R |
| | Covering blank sheet - Height 1990 mm / 2200 mm | 1 piece | 9500 1 3 R |
| - | Hinge reinforcement plates | 1 piece | 9500 18 |
| - | Set of plates for housing insertion | 1 piece | 9500 24 |

*The minimum order quantity is indicated.

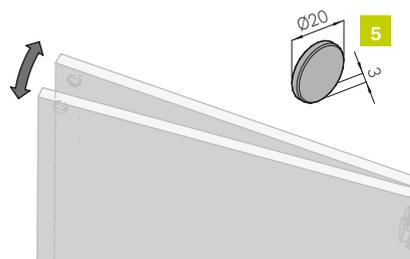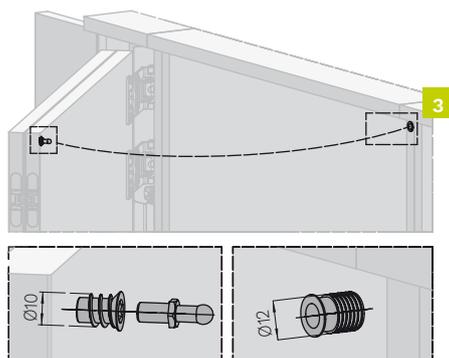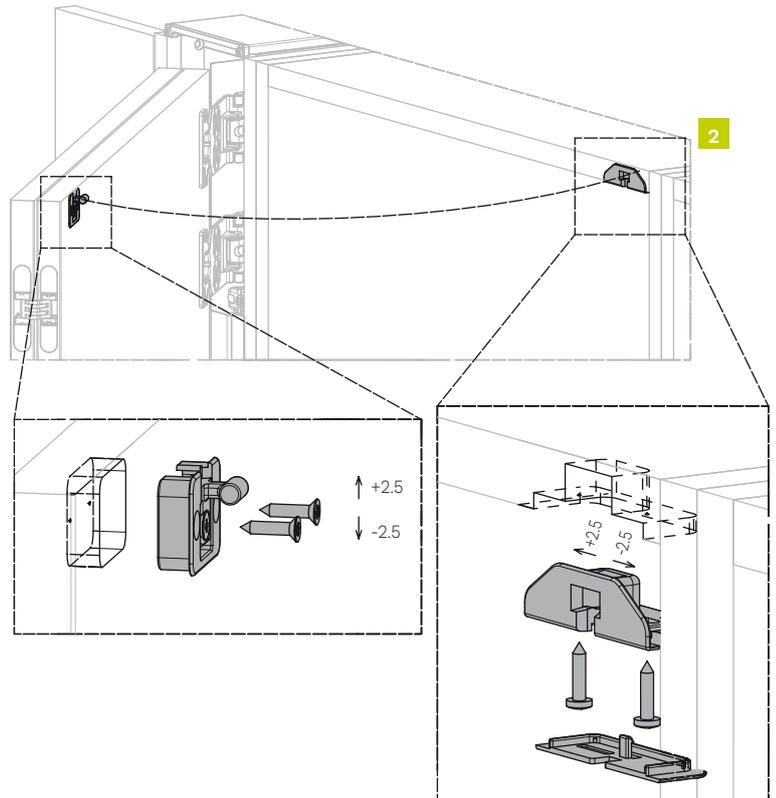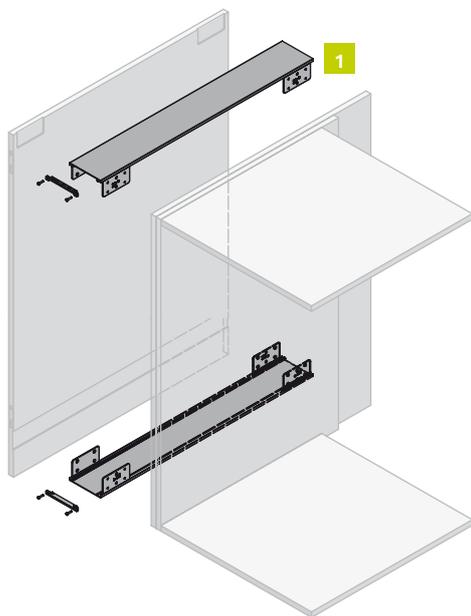




Spare parts

| Figure | Component | *Quantity | Item number. | Which set is it for? |
|--------|--|-----------|--------------|-----------------------------|
| 7 | Hinge double door leaf nickel plated | 1 piece | 9500 10 1 | NEW DARWIN DOUBLE DOOR LEAF |
| 8 | Track covering sheet (height 1990-2200 mm) | 2 pieces | 9500 7 | NEW DARWIN DOUBLE DOOR LEAF |
| | Track covering sheet (height 2200-2700 mm) | 2 pieces | 9500 8 | NEW DARWIN DOUBLE DOOR LEAF |
| | Track covering sheet (height 1200-1400 mm) | 2 pieces | 9500 19 | NEW DARWIN DOUBLE DOOR LEAF |
| - | Door guide unit with pulleys | 1 piece | 9500 12 | NEW DARWIN DOUBLE DOOR LEAF |
| - | Adjustable catch support kit | 2 pieces | 9500 14 R | NEW DARWIN DOUBLE DOOR LEAF |
| 9 | Upper and lower kit units for door leaf | 2 pieces | 9500 21 | NEW DARWIN DOUBLE DOOR LEAF |
| 10 | Set of backside upper and lower stops | 2 pieces | 9500 22 | NEW DARWIN DOUBLE DOOR LEAF |

*The minimum order quantity is indicated.

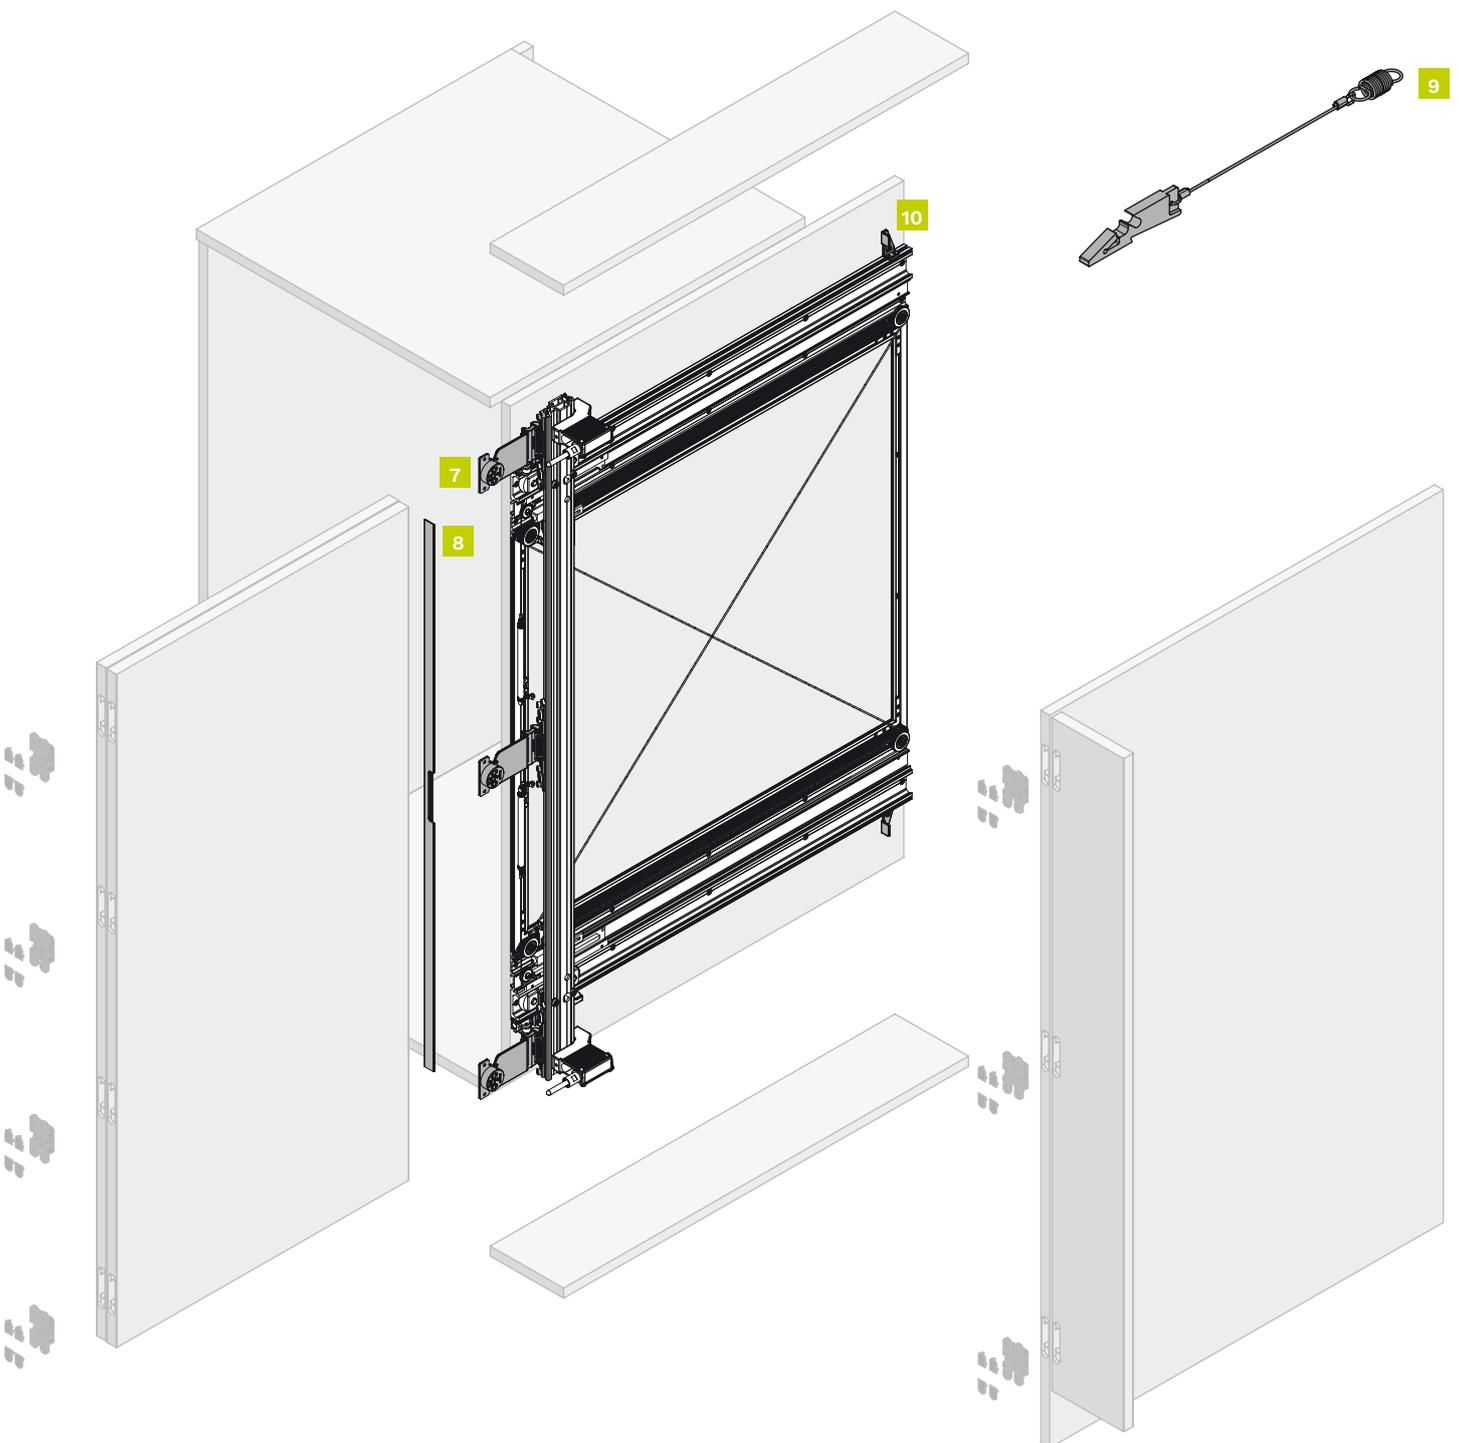



The illustrations, photos, images and technical data, features and colours of the catalogue are purely indicative and are not binding for Krona Koblenz. The deviations cannot create any reasons for not accepting the goods or compromise the contract or cause claims. All the models can be altered, improved or slightly modified in their sections, structure or drawing without any previous notification. Therefore, if at our incontestable discretion the quality and the look of our products remain unchanged, a customer will not be able either to terminate the contract or to have particular discounts or bonus.

K Krona Koblenz

OFFICES AND CONTACTS

Headquarter

ITALY

Krona Koblenz SpA

+39 0541 657040

E-mail: info@k-group.com

Via Piane, 90
47853 Coriano (RN)

SPAIN

Krona Koblenz S.L.

+34 93 591 0410

E-mail: info@k-group.com

P.I. MOLI D'EN XEC NAVE n P3-3/6
_ c/ Moli d' en Xec, n 49/55
C.P. 08291 Ripollet - (Barcelona)

FRANCE

Krona Koblenz Sas

+33-474090939

E-mail: info@k-group.com

Saint Georges De Reneins (69830)
635 Boulevard Napoléon
Bullukian

RUSSIA

Крона Кобленц ООО

+7 (495) 532-74-32

E-mail: info@kronakoblenz.ru

117623, Москва,
Варшавское шоссе,
дом 268, строение 1, блок А11

INDIA

Koblenz Utturkar
Fittings Private Limited

+91 020 24540000

E-mail: info@k-group.com

FLAT No. 3, 1875, Sadashiv Peth,
Shree Balaji Prasad Society,
Pune - 411030, Maharashtra



www.kronakoblenz.com



@krona_koblenz



@Krona Koblenz



@Krona Koblenz



@Kronakoblenz